

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	26 AWG 7/34 STRANDED TINNED COPPER	.019"
INSULATION:	HIGH DENSITY POLYETHYLENE, .009" NOM. WALL THICKNESS	.037"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS	.074"
CABLE:	(4) TWISTED PAIRS TWISTED TOGETHER AND WRAPPED WITH A FOAM POLYPROPYLENE TAPE TO FORM A CABLE CORE.	.143"
SHIELDS:	AN OVERALL SHIELD OF 38 AWG TINNED COPPER BRAID (75% MINIMUM COVERAGE), SHALL BE APPLIED OVER THE CABLE CORE. A SECOND SHIELD OF ALUMINIZED POLYESTER FOIL (FOIL IN, 100% COVERAGE) SHALL BE APPLIED OVER THE BRAID.	.174"
JACKET:	THERMOPLASTIC ELASTOMER, (COLOR, PER CHART 1), .037" NOM. WALL THICKNESS (PRESSURE)	OVERALL CABLE DIAMETER .245" ± .005"

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	75°C (JACKET 105°C, 75°C OIL)
TEMPERATURE RATING, MIN.	-20°C (PER UL 444 COLD BEND)
TEMPERATURE RATING, MIN.	-40°C (MANUFACTURER'S RECOMMENDED)
WT./M', NOM., NET.	35.3 LBS.
JACKET IS WELD SPATTER RESISTANT	
JACKET IS SUNLIGHT RESISTANT	
FLEX LIFE (126 CYCLES/MIN, @ 20°C)	1 MILLION CYCLE TEST (10X CABLE O.D., MINIMUM RADIUS) 10 MILLION CYCLE TEST (20X CABLE O.D., MINIMUM RADIUS)
TORSION TEST (1 LB LOAD, 360°, 71 CYCLES/MIN, @ 20°C)	3 MILLION CYCLE TEST
JACKET CUTTING/MACHINING OIL RESISTANCE (PER QUABBIN TEST REPORT #TR 08-0001) (6 MONTHS @ 20°C)	
TENSILE STRENGTH RETENTION, NOM.	80%
ELONGATION RETENTION, NOM.	100%

CHART 1:

QUABBIN P/N	JACKET COLOR
5083	BLACK
5084	VIOLET
5088	TEAL


- 3) ELECTRICAL CHARACTERISTICS:
SEE PAGE 2
- 4) AGENCY APPROVALS:
NEC (UL) TYPE CMX OUTDOOR - CM
CEC C(UL) TYPE CMX OUTDOOR - CM
EU CE MARK: MEETS EU DIRECTIVE 2011/65/EU (RoHS II)

- 5) APPLICATION:
U.S. PATENT NO. US 8,487,184 B2

- 6) PRINT: (WHITE INK ON BLACK JACKET, ALL OTHERS BLACK INK)
QUABBIN DATAMAX EXTREME HIGH FLEX INDUSTRIAL ETHERNET/IP PATCH CORD CAT 5e SF/UTP P/N (**QWC P/N PER CHART 1**) -- U.S. PATENT NO. US 8,487,184 B2 -- C(UL)US TYPE CMX OUTDOOR - CM 4PR 26 AWG 75C SUN RES -- CE RoHS -- (**LOT DESIGNATOR**) (**SEQUENTIAL FOOTAGE**)

- 7) COLOR CODE:
1. BLUE X WHITE/BLUE
2. ORANGE X WHITE/ORANGE
3. GREEN X WHITE/GREEN
4. BROWN X WHITE/BROWN

- 8) PACKAGING:
TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

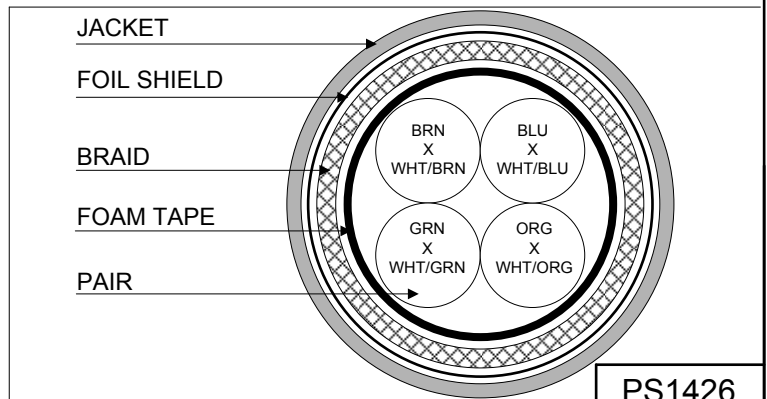

PS1426

Created 4/12/11	DRAWN: SGH 03/21/19	
REV. 08	CHECKED: ZRS 03/25/19	
TITLE 4PR. SF/UTP HIGH FLEX INDUSTRIAL ETHERNET PATCH CORD -- CAT 5e		
DRAWING #	QWC0026	1 of 2

CUSTOMER APPROVAL: _____ DATE: _____

3) ELECTRICAL CHARACTERISTICS:


POE COMPLIANT TO 68 METERS WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184
 CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 68 METER LENGTH
 CAPACITANCE, MUTUAL, NOM. 13.5 PF/FT. AT 1 MHz
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. 42.6 Ω/1,000'

NOTE: TESTING FOR THE FOLLOWING IS CONDUCTED OFF THE REEL. (FOR 100m OF CABLE)

IMPEDANCE, NOM.	100 ± 15 Ω 1 - 100 MHz	
RETURN LOSS	1 ≤ f < 10 MHz	20 + 6 LOG(f) dB MIN*
	10 ≤ f < 20 MHz	26 dB MIN*
	20 ≤ f ≤ 100 MHz	26 - 5 LOG(f/20) dB MIN*
NEXT	1 ≤ f ≤ 100 MHz	35.3 - 15 LOG(f/100) dB MIN
PSNEXT	1 ≤ f ≤ 100 MHz	32.3 - 15 LOG(f/100) dB MIN
ACRF	1 ≤ f ≤ 100 MHz	23.8 - 20 LOG(f/100) dB MIN
PSACRF	1 ≤ f ≤ 100 MHz	20.8 - 20 LOG(f/100) dB MIN
INSERTION LOSS	1 ≤ f ≤ 100 MHz	1.5[1.967 √f + 0.023(f) + 0.050/√f] dB MAX
DELAY	1 ≤ f ≤ 100 MHz	534 + 36/√f ns MAX
DELAY SKEW	1 ≤ f ≤ 100 MHz	<25 ns
COUPLING ATTENUATION PER IEC 62153-4-9	30 ≤ f ≤ 100 MHz	50 dB MINIMUM
VELOCITY OF PROPAGATION	68%	

*PER ODVA VOLUME 2 ETHERNET/IP

PS1426

Created 4/12/11	DRAWN: ^{SGH} 03/21/19	
REV. 08	CHECKED: ^{ZRS} 03/25/19	
TITLE 4PR. SF/UTP HIGH FLEX INDUSTRIAL ETHERNET PATCH CORD -- CAT 5e		
DRAWING #		2 of 2

CUSTOMER APPROVAL:

DATE: