

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050"
CABLE:	(20) INSULATED CONDUCTORS TWISTED TOGETHER WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE (FILLER CENTER MEMBER)		.276"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.340"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	86.2 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	28 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	16.7 Ω/1000'

4) AGENCY APPROVALS:

(UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464 80C 300V

5) APPLICATION:


RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:

QUABBIN 7170 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

7) COLOR CODE:

1. BLACK
2. RED
3. WHITE
4. GREEN
5. ORANGE
6. BLUE
7. BROWN
8. YELLOW
9. VIOLET
10. GRAY
11. PINK
12. TAN
13. RED/GREEN
14. RED/YELLOW
15. RED/BLACK
16. WHITE/BLACK
17. WHITE/RED
18. WHITE/GREEN
19. WHITE/YELLOW
20. WHITE/BLUE

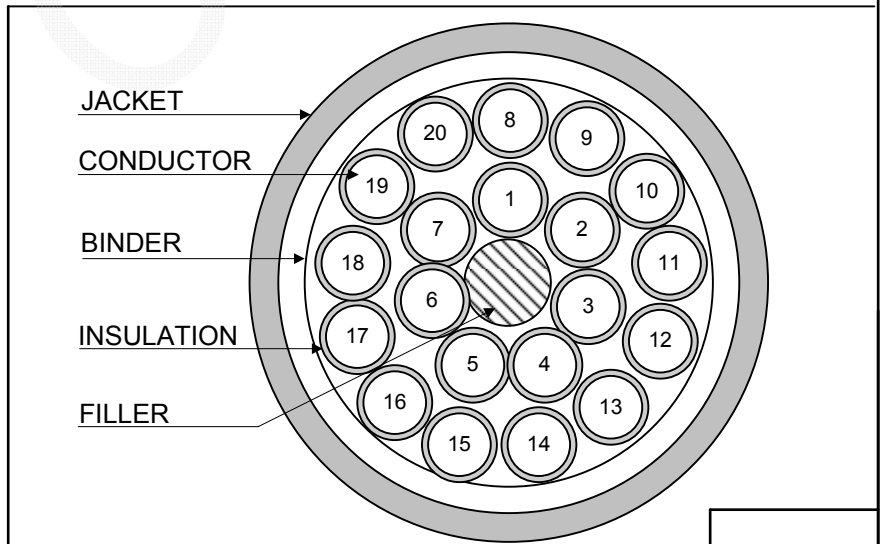

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

CUSTOMER APPROVAL:

DATE:

Created 01/19/98	DRAWN: SGH 03/22/18	
REV. 04	CHECKED: ZRS 03/22/18	
TITLE 20/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7170	1 of 1