

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 22 AWG 7/30 STRANDED TINNED COPPER .030"
 INSULATION: POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS .050"
 CABLE: (20) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE. .275"
 SHIELD: AN OVERALL ALUMINUM POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE)
 SHALL BE APPLIED OVER THE CABLE CORE AND SHALL INCLUDE A 22 AWG 7/30
 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE. .278"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS
 OVERALL CABLE DIAMETER .342"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 TEMPERATURE RATING, MIN. -20°C
 WT./M', NOM., NET. 76.7 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 37 PF/FT.
 CAPACITANCE, GROUNDED, NOM. 68.5 PF/FT
 DIELECTRIC WITHSTANDING, MIN. 2000V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 16.7 Ω/1000'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 UL STYLE 2464
 CSA AWM FT4

5) APPLICATION:
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7570 (UL) TYPE CM 22 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
- | | |
|-----------|------------------|
| 1. BLACK | 11. PINK |
| 2. RED | 12. TAN |
| 3. WHITE | 13. RED/GREEN |
| 4. GREEN | 14. RED/YELLOW |
| 5. ORANGE | 15. RED/BLACK |
| 6. BLUE | 16. WHITE/BLACK |
| 7. BROWN | 17. WHITE/RED |
| 8. YELLOW | 18. WHITE/GREEN |
| 9. VIOLET | 19. WHITE/YELLOW |
| 10. GRAY | 20. WHITE/BLUE |

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

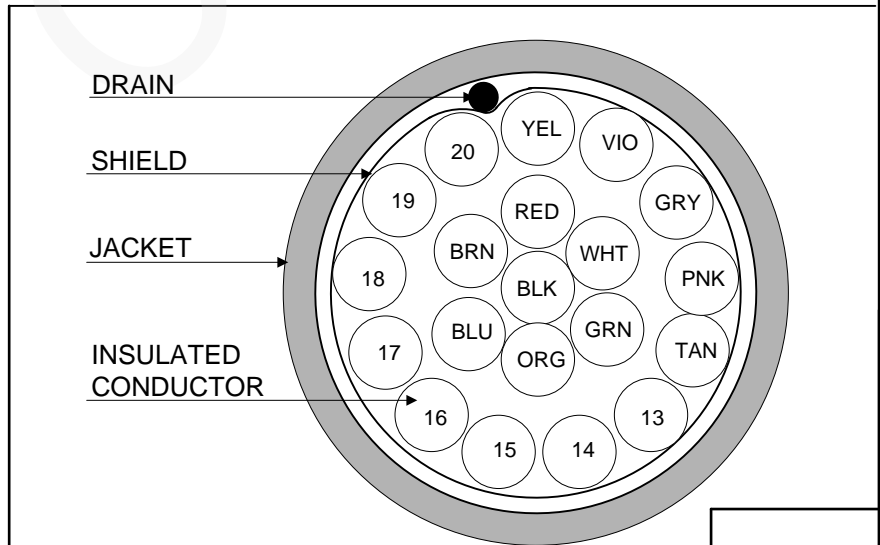

Created 04/02/96	DRAWN: BMD 01/26/17	
REV. 04	CHECKED: GBM 01/27/17	
TITLE 20/C 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7570	1 of 1

CUSTOMER APPROVAL:

DATE: