

1) CONSTRUCTION: NOM. DIA.  
 CONDUCTOR: 26 AWG 7/34 STRANDED TINNED COPPER .019"  
 INSULATION: POLYVINYLCHLORIDE, .007" NOM. WALL THICKNESS .033"  
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS .066"  
 CABLE: (3) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE .103"  
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .019" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .155"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 60°C  
 WT./M', NOM., NET. 11.8 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL, NOM. 19 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 39.7 Ω/1,000'  
 IMPEDANCE, CHARACTERISTIC, NOM 100 Ω


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM

5) APPLICATION:  
 CATEGORY 3 JUMPER CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN DATAMAX P/N 9306R -- (UL) TYPE CM 26 AWG -- PATCH CORD/JUMPER CAT 3 -- RoHS --  
**(LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)**

7) COLOR CODE: (LONGITUDINAL STRIPE)  
 1. WHITE/BLUE X BLUE  
 2. WHITE/ORANGE X ORANGE  
 3. WHITE/GREEN X GREEN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

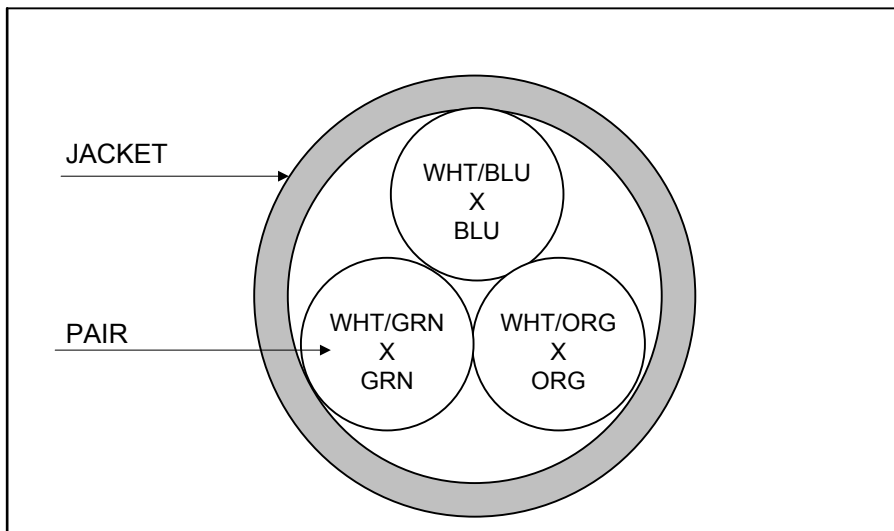

REVISION 07	DATE:	DRAWN S. ADDIE 7/12/96	
REVISED BY	<i>B. Duczynski</i> 12/17/09	CHECKED J. RIVERNIDER 7/12/96	
CHECKED	<i>G. Munn</i> 12/17/09	CHECKED M. FERRERO 7/12/96	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE PATCH CABLE FOR CAT 3
			QUABBIN P/N 9306 1 OF 1