

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS		.062"
CABLE:	(3) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.133"
SHIELD:	ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) WITH A 24 AWG 7/34 STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION.		.136"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .038" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.212" (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	80°C & 105°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	25.2 LBS.
JACKET IS SUNLIGHT RESISTANT	

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	40 PF/FT
CAPACITANCE, GROUNDED, NOM.	74 PF/FT
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	16.7 Ω/1,000'

4) AGENCY APPROVALS:

- NEC (UL) TYPE PLTC 105C 300V
- NEC (UL) TYPE ITC 105C 300V
- UL AWM STYLE 2464 80C 300V
- CSA FAS 105 FT4
- CSA AWM FT4 90C 300V

5) APPLICATION:

PROCESS SYSTEM INTERCONNECT. POWER LIMITED TRAY CABLE, INSTRUMENTATION TRAY CABLE, CLASS 3 CIRCUITS. RoHS COMPLIANT.

6) PRINT:


QUABBIN 0215 (UL) TYPE PLTC OR ITC 22 AWG 105C SUN RES OR AWM 2464 -- CSA LL66965 FAS 105 22 AWG 3 CONDUCTOR FT4 OR AWM I/II A/B 90C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:

1. BLACK
2. RED
3. WHITE

8) PACKAGING

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

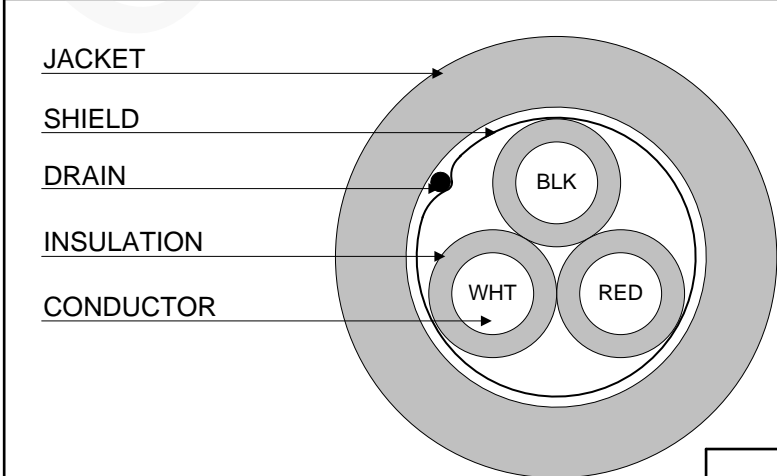

CUSTOMER APPROVAL:

DATE:

Created 06/10/97	BMD DRAWN: 05/24/19	
REV. 04	ZRS CHECKED: 05/28/19	
TITLE 3/C 22 AWG -- TYPE PLTC, TYPE ITC, AWM 2464 -- CSA FAS, AWM FT4 CABLE -- UNSHIELDED		
QUABBIN P/N	0215	1 of 1