

1) CONSTRUCTION:

CONDUCTOR:	24 AWG 7/32 STRANDED TINNED COPPER	NOM. DIA.	.024"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.044"
CABLE:	(2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE.		.088"
JACKET:	POLYVINYLCHLORIDE, BLACK, .032" +/- .002" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.150" (±.007")

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	11.8 LBS.
SUNLIGHT RESISTANCE	PER UL 13, PARAGRAPH 24.1

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	21 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	26.2 Ω/1000'


4) AGENCY APPROVALS:  
 CSA AWM FT4  
 NEC (UL) TYPE CM  
 UL AWM STYLE 2464

5) APPLICATION:  
 RoHS COMPLIANT MATERIALS

6) PRINT:  
 E118830 (UL) TYPE CM 24 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. WHITE

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

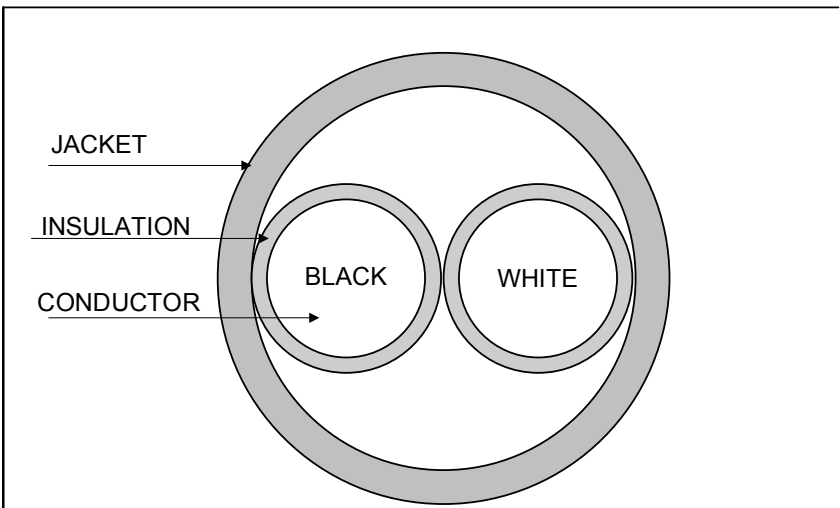

REVISION 05	DATE:	DRAWN S. ADDIE 04/02/99	
REVISED BY B. Duceyuski	6/10/08	CHECKED G. MUNROE 04/02/99	
CHECKED G. Munroe	06/10/08	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 2/C 24AWG PVC/PVC CABLE -- TYPE CM. AWM 2464. CSA AWM FT4
			QUABBIN P/N 02213 1 OF 1