

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 14 AWG 41/30 STRANDED TINNED COPPER .070"
 INSULATION: POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS .102"
 CABLE: (12) COLOR CODED SINGLES TWISTED TOGETHER AND WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE .416"
 RIPCORD: INCLUDED UNDER JACKET FOR STRIPPING
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS.
OVER ALL CABLE DIAMETER .480"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 105°C
 TEMPERATURE RATING, MIN. -20°C
 WT./M', NOM., NET. 213.2 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 31 PF/FT.
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS
 VOLTAGE RATING, MAX. 600V
 D.C. RESISTANCE, MAX. PER ASTM B286 2.94 Ω/1000'


4) AGENCY APPROVALS:
 UL AWM STYLE 2586 105C 600V
 CSA AWM FT4
 MEETS VW-1 FLAME TEST

5) APPLICATION:
 INDUSTRIAL CONTROLS, MEDICAL ELECTRONICS AND OTHER APPLICATIONS WHERE A COMPACT 600V RATED CABLE IS REQUIRED. RoHS COMPLIANT MATERIALS.

6) PRINT:
 600V-TROL® E69976 **RU** AWM 2586 VW-1 -- CSA LL51726 AWM I/II A/B 105C 600V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. BLACK
 2. BROWN
 3. RED
 4. ORANGE
 5. YELLOW
 6. GREEN
 7. BLUE
 8. VIOLET
 9. GRAY
 10. WHITE
 11. WHITE/BLACK
 12. WHITE/BROWN

8) PACKAGING
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

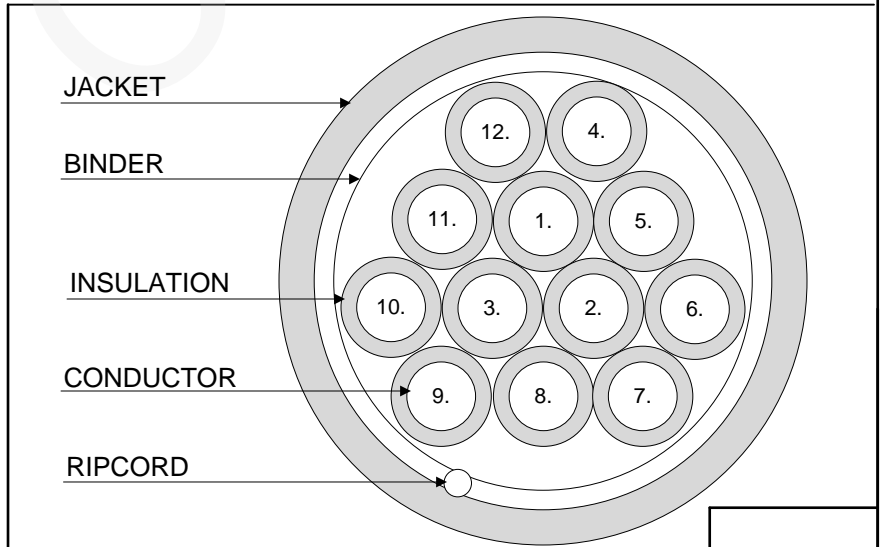

CUSTOMER APPROVAL:

DATE:

Created 04/12/19	DRAWN: SGH 04/12/19	
REV. 02	CHECKED: ZRS 04/12/19	
TITLE 600V-TROL® -- 12/C 14 AWG -- AWM 2586, CSA AWM FT4 CABLE		
DRAWING #	0747	1 of 1