

1) CONSTRUCTION:

CONDUCTOR:	24 AWG 7/32 STRANDED TINNED COPPER	NOM. DIA.	.024"
INSULATION:	HIGH DENSITY POLYETHYLENE, .007" NOM. WALL THICKNESS		.039" MAX
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS		.078"
CABLE:	(4) TWISTED PAIRS TWISTED TOGETHER AND WRAPPED WITH A CLEAR POLYESTER TAPE TO FORM A CABLE CORE		.171"
JACKET:	LOW SMOKE ZERO HALOGEN, (COLOR, PER CHART 1), .030" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.231" (BY PI TAPE)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	75°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	27.4 LBS.
FLAME RATING	VW-1
CORROSIVE GAS	IEC 60754-2
SMOKE EMISSION	IEC 61034-1 & -2

CHART 1:

QUABBIN P/N	JACKET COLOR
1300	BLACK
1301	BROWN
1302	RED
1303	ORANGE
1304	YELLOW
1305	GREEN
1306	BLUE
1307	VIOLET
1308	GRAY
1309	WHITE
1310	BEIGE
1312	PINK

3) ELECTRICAL CHARACTERISTICS:

SEE PAGE 2

4) AGENCY APPROVALS:

NEC (ETL) TYPE CMX  
CEC C(ETL) TYPE CMX

5) APPLICATION:

SUITABLE FOR FUTURE APPLICATIONS AND PROTOCOLS BEYOND 1000BASE-T (GIGABIT ETHERNET).  
CABLE FITS STANDARD MODULAR PLUGS. RoHS COMPLIANT MATERIALS.

6) PRINT: (WHITE INK ON BLACK JACKET, ALL OTHERS BLACK INK)


QUABBIN DATAMAX 6 U/UTP PATCH CORD P/N  
**(QWC P/N PER CHART 1) LOW SMOKE ZERO HALOGEN TIA-568.2-D CAT 6 -- C(ETL)US TYPE CMX 75C 24 AWG -- VW-1 -- RoHS -- (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)**

7) COLOR CODE:

1. WHITE/BLUE X BLUE
2. WHITE/ORANGE X ORANGE
3. WHITE/GREEN X GREEN
4. WHITE/BROWN X BROWN

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

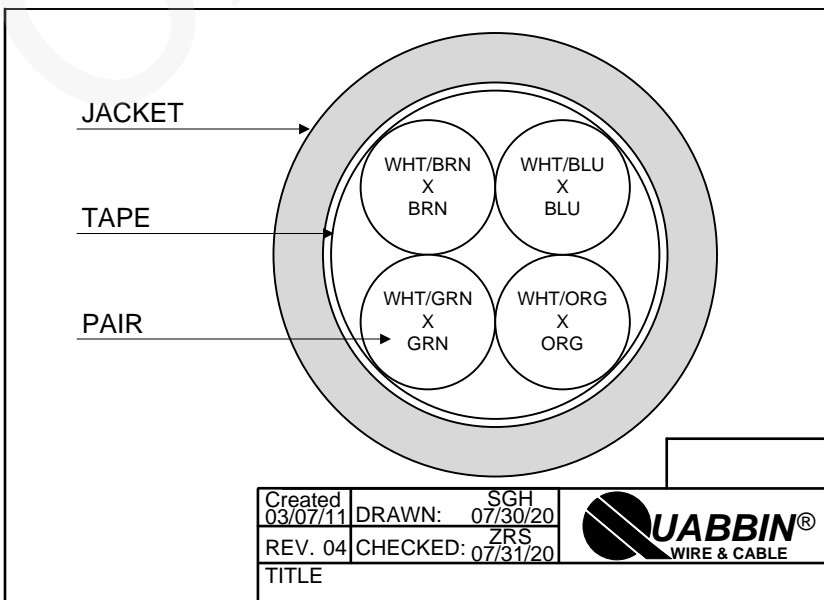

CUSTOMER APPROVAL:

DATE:

Created 03/07/11	DRAWN: SGH 07/30/20
REV. 04	CHECKED: ZRS 07/31/20



TITLE  
DATAMAX 6 PATCH CABLE -- TYPE CMX


DRAWING# QWC0018 1 of 2

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	13.5 PF/FT. AT 1 MHz
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	26.2Ω/1,000' (8.6 Ω/100m)

**NOTE:** TESTING FOR THE FOLLOWING IS CONDUCTED OFF THE REEL. (FOR 100m OF CABLE)

IMPEDANCE	100 ± 15 Ω 1 – 100 MHz; 100 ± 20 Ω 100 – 250 MHz	
IMPEDANCE, SMOOTHED	100 ± 3 Ω TYPICAL 5 – 250 MHz	
RETURN LOSS	1 ≤ f < 10 MHz	20 + 5 LOG(f) dB MIN
	10 ≤ f < 20 MHz	25 dB MIN
	20 ≤ f ≤ 250 MHz	25 – 8.6LOG(f/20) dB MIN
PS NEXT	1 ≤ f ≤ 250 MHz	42.3 – 15LOG(f/100) dB MIN
NEXT	1 ≤ f ≤ 250 MHz	44.3 – 15LOG(f/100) dB MIN
PSACRF	1 ≤ f ≤ 250 MHz	24.8 – 20LOG(f/100) dB MIN
ACRF	1 ≤ f ≤ 250 MHz	27.8 – 20LOG(f/100) dB MIN
INSERTION LOSS	1 ≤ f ≤ 250 MHz	1.2[1.808√f + 0.017(f) + 0.2/√f] dB MAX
DELAY	1 ≤ f ≤ 250 MHz	534 + 36/√f ns MAX
DELAY SKEW	1 ≤ f ≤ 250 MHz	<25ns
TCL	1 ≤ f ≤ 250 MHz	30 – 10LOG(f/100) dB MIN
ELTCTL	1 ≤ f ≤ 30 MHz	35 – 20LOG(f) dB MIN

Created 03/07/11	DRAWN: <sup>SGH</sup> 07/30/20	
REV. 04	CHECKED: <sup>ZRS</sup> 07/31/20	
TITLE DATAMAX 6 PATCH CABLE -- TYPE CMX		
DRAWING#		QWC0018
		2 of 2

CUSTOMER APPROVAL:

DATE: