

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	16 AWG 19/.0117 STRANDED TINNED COPPER	.057"
INSULATION:	POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS	.089"
CABLE:	(4) INSULATED CONDUCTORS TWISTED TOGETHER WITH A 3 1/4" LAY TO FORM A CABLE CORE.	.215"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	
	OVERALL CABLE DIAMETER	.279"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	80°C & 90°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	56.2 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	26 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	4.82 Ω/1000'

4) AGENCY APPROVALS:

- NEC (UL) TYPE CL2
- UL STYLE 2464
- CSA AWM FT4


5) APPLICATION:  
INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
QUABBIN 3100 (UL) TYPE CL2 16 AWG 90C OR AWM 2464 -- CSA LL51726 AWM I/II A/B 90C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:

1. BLACK
2. WHITE
3. RED
4. GREEN

8) PACKAGING:  
TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

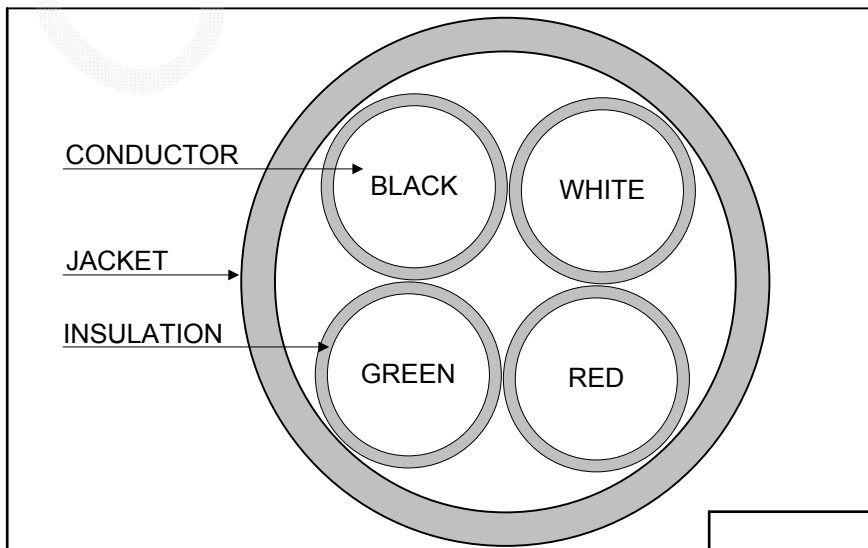

Created 11/04/94	DRAWN: SGH 02/12/19	
REV. 04	CHECKED: ZRS 02/12/19	
TITLE 4/C 16 AWG PVC/PVC CABLE – TYPE CL2, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	3100	1 of 1

CUSTOMER APPROVAL:

DATE: