

1) CONSTRUCTION:  
 CONDUCTOR: 18 AWG 16/30 STRANDED TINNED COPPER NOM. DIA. .045"  
 INSULATION: POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS .077"  
 CABLE: (2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE .154"  
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .218"

2) PHYSICAL PROPERTIES:  
 TEMPERATURE RATING, MAX. 80°C & 90°C  
 TEMPERATURE RATING, MIN. -20°C  
 WT./M', NOM., NET. 25.8 LBS.

3) ELECTRICAL CHARACTERISTICS:  
 CAPACITANCE, MUTUAL AT 1MHZ, NOM. 25 PF/FT.  
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS  
 VOLTAGE RATING, MAX. 300V  
 D.C. RESISTANCE, MAX. PER ASTM B286 7.15 Ω/M'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 CEC C(UL) TYPE CM  
 UL AWM STYLE 2464  
 CSA TYPE CMG

5) APPLICATION:  
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 4090 TYPE CM C(UL)US 18 AWG 90C OR AWM 2464 -- CSA LL51726 TYPE CMG 90C -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. RED

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

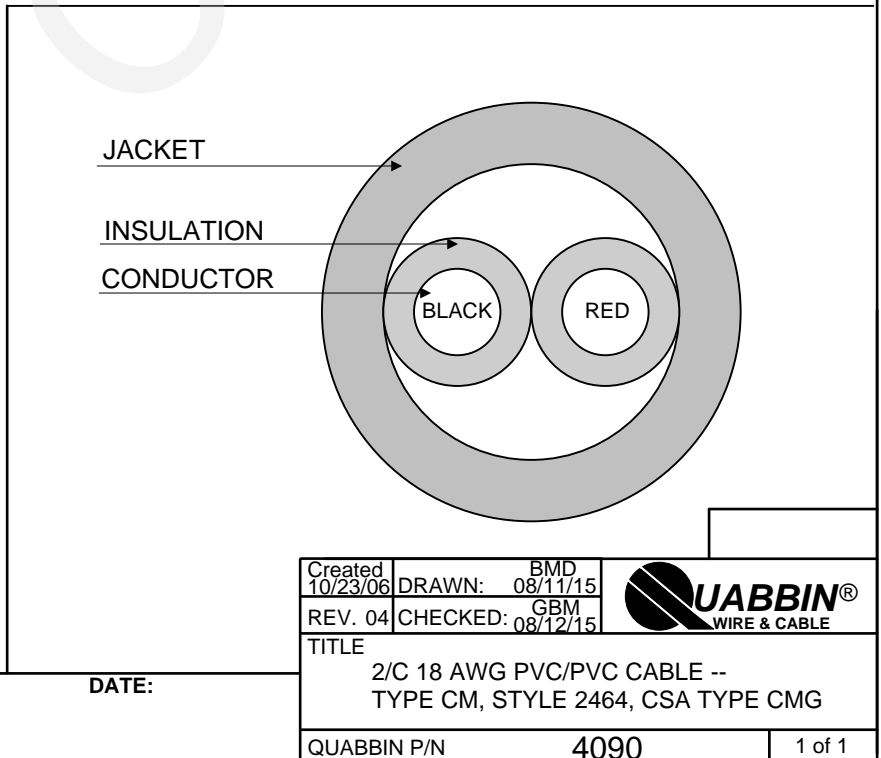

CUSTOMER APPROVAL:

DATE:

Created 10/23/06	DRAWN: 08/11/15	BMD	
REV. 04	CHECKED: 08/12/15	GBM	
TITLE 2/C 18 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA TYPE CMG			
QUABBIN P/N		4090	1 of 1