

1) CONSTRUCTION:

CONDUCTOR:	18 AWG 7/26 STRANDED TINNED COPPER	NOM. DIA.	.048"
INSULATION:	POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS		.080"
CABLE:	(2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE		.160"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .025" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.210"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C, 80°C & 90°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	23.6 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	15 PF/FT. AT 1 MHz
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	6.54 Ω/1000'


4) AGENCY APPROVALS:  
 NEC (UL) TYPE CM  
 CSA AWM FT4  
 UL AWM STYLE 2095

5) APPLICATION:  
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 4140 (UL) TYPE CM 18 AWG OR AWM 2095 -- CSA LL51726 AWM I/II A/B 90C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

7) COLOR CODE:  
 1. BLACK  
 2. WHITE

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

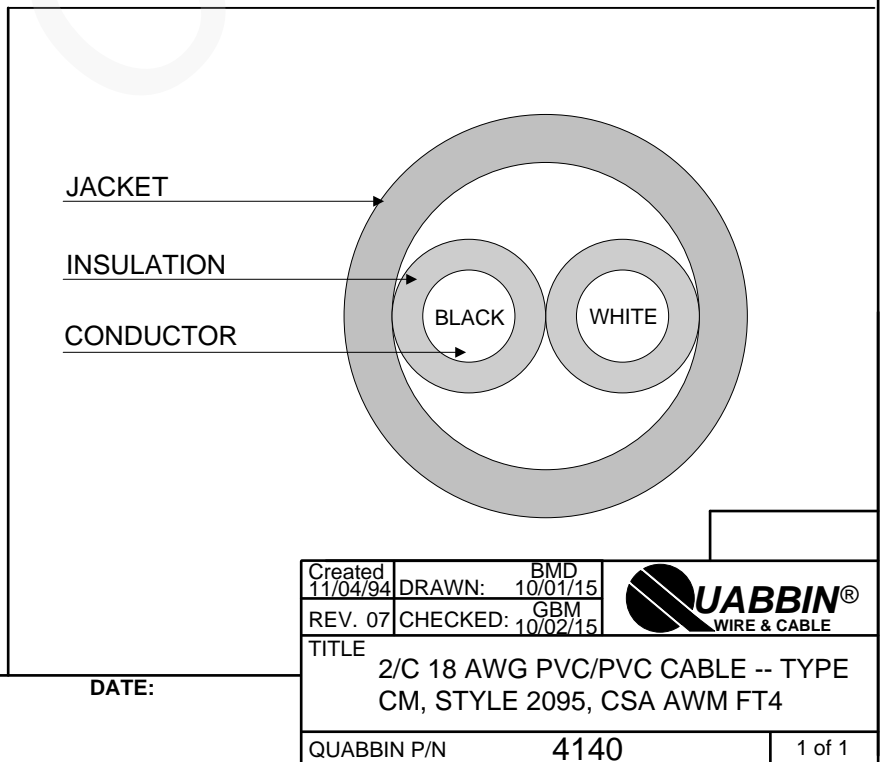

CUSTOMER APPROVAL:

DATE: