


- 1) CONSTRUCTION:
- | | | | |
|-------------|---|-----------|-------|
| CONDUCTOR: | 18 AWG 16/30 STRANDED TINNED COPPER | NOM. DIA. | .045" |
| INSULATION: | SEMI-RIGID POLYVINYLCHLORIDE .013" NOM. WALL THICKNESS | | .071" |
| PAIRS: | COLOR CODED SINGLES TWISTED INTO PAIRS | | .142" |
| CABLE: | (3) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE. | | .226" |
| JACKET: | POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS | | .290" |
| | OVERALL CABLE DIAMETER | | |
- 2) PHYSICAL PROPERTIES:
- | | |
|--------------------------|-------------|
| TEMPERATURE RATING, MAX. | 60°C & 80°C |
| TEMPERATURE RATING, MIN. | -20°C |
| WT./M', NOM., NET. | 53.8 LBS. |
- 3) ELECTRICAL CHARACTERISTICS:
- | | |
|-------------------------------------|---------------|
| CAPACITANCE, MUTUAL, NOM. | 17 PF/FT. |
| DIELECTRIC WITHSTANDING, MIN. | 1500V RMS |
| VOLTAGE RATING, MAX. | 300V |
| D.C. RESISTANCE, MAX. PER ASTM B286 | 7.15 Ω/1,000' |
- 4) AGENCY APPROVALS:
- NEC (UL) TYPE CM
 UL STYLE 2464
 CSA AWM FT4
- 5) APPLICATION:
- INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.
- 6) PRINT:
- QUABBIN 4150 (UL) TYPE CM 18 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)
- 7) COLOR CODE:
1. BLACK X RED
 2. BLACK X WHITE
 3. BLACK X GREEN
- 8) PACKAGING:
- TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING



Created 5/26/99	DRAWN: BMD 10/01/15
REV. 05	CHECKED: GBM 10/01/15

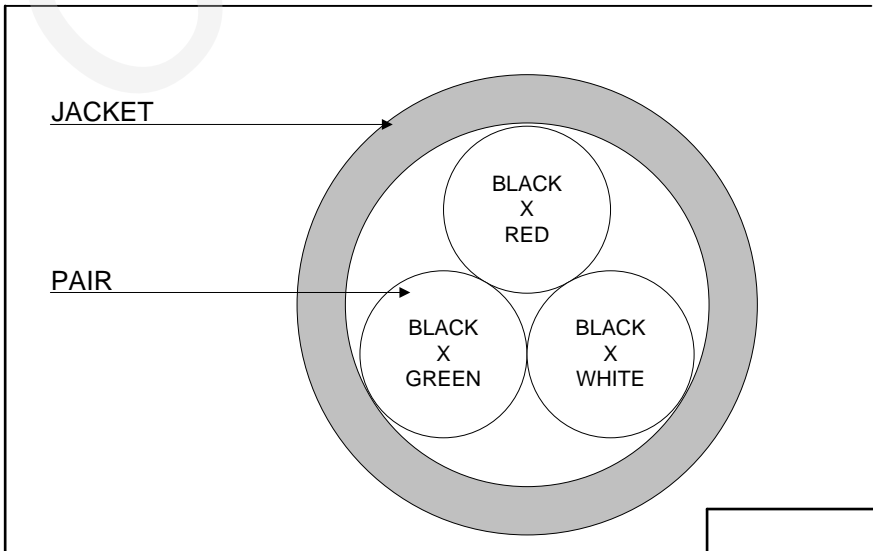

TITLE
 6/C (3 PR) 18 AWG PVC/PVC CABLE --
 TYPE CM, STYLE 2464, CSA AWM FT4

CUSTOMER APPROVAL:

DATE: