

1) CONSTRUCTION:
 CONDUCTOR: 18 AWG 16/30 STRANDED TINNED COPPER
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS
 CABLE: (6) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE
 JACKET: POLYVINYLCHLORIDE, CHROME, .035" NOM. WALL THICKNESS
 OVERALL CABLE DIAMETER

NOM. DIA.
 .045"
 .071"
 .142"
 .349"
 .419"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 102.1 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM. 18 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 2000V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 7.15 Ω/1000'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 UL AWM STYLE 2464
 CSA AWM FT4

5) APPLICATION:
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 4160 (UL) TYPE CM 18 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
 1. BLACK X RED
 2. BLACK X WHITE
 3. BLACK X GREEN
 4. BLACK X BLUE
 5. BLACK X YELLOW
 6. BLACK X BROWN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

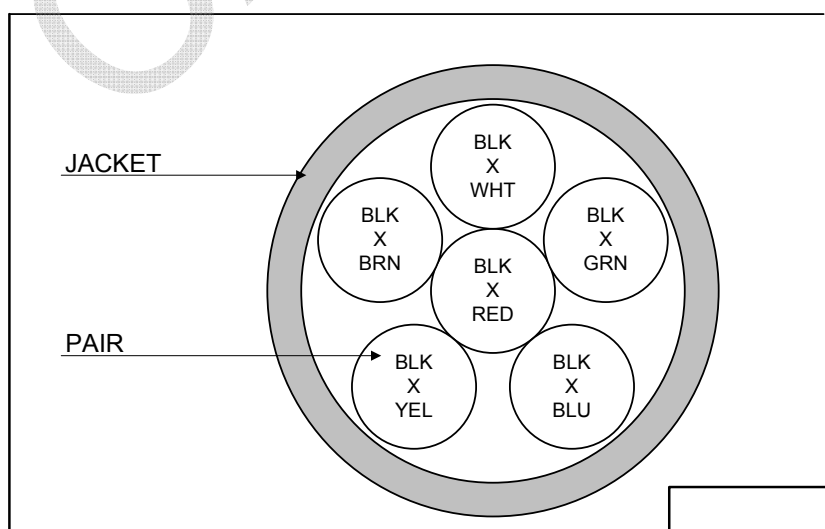

Created 9/5/95	DRAWN: BMD 1/25/13	
REV. 02	CHECKED: GBM 01/28/13	
TITLE		
12/C 6 PR. 18 AWG PVC/PVC -- TYPE CM, AWM 2464, CSA AWM FT4		
QUABBIN P/N	4160	1 of 1

CUSTOMER APPROVAL: _____ DATE: _____