

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	.030"
INSULATION:	HIGH DENSITY POLYETHYLENE, .018" NOM. WALL THICKNESS	.066 ± .001"
CABLE:	(4) COLOR CODED WIRES CABLED TOGETHER WITH A PVC ROD FILLER (.027" ± .005") AND WRAPPED WITH A FOAM POLYPROPYLENE TAPE TO FORM A CABLE CORE.	.160"
SHIELDS:	AN OVERALL SHIELD OF 38 AWG TINNED COPPER BRAID (80% MINIMUM COVERAGE), SHALL BE APPLIED OVER THE CABLE CORE. A SECOND SHIELD OF AN OVERALL ALUMINIZED POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) SHALL BE APPLIED OVER THE BRAID.	.180"
JACKET:	THERMOPLASTIC ELASTOMER, GREEN (CR# 70), .035" NOM. WALL THICKNESS (PRESSURE) OVERALL CABLE DIAMETER	.250" (BY CALIPER)

2) PHYSICAL PROPERTIES:		
TEMPERATURE RATING, MAX.	75°C & 80°C	
TEMPERATURE RATING, MIN. (STATIC)	-40°C	
WT./M', NOM., NET.	39.0 LBS.	
JACKET IS WELD SPATTER RESISTANT		
JACKET IS SUNLIGHT RESISTANT		
FLEX LIFE (PENDING)		
(126 CYCLES/MIN, @ 20°C)	1 MILLION CYCLE TEST (10X CABLE O.D., MINIMUM RADIUS)	
	10 MILLION CYCLE TEST (20X CABLE O.D., MINIMUM RADIUS)	
TORSION TEST (PENDING)		
(1 LB LOAD, 360°, 71 CYCLES/MIN, @ 20°C)	3 MILLION CYCLE TEST	
JACKET IS CUTTING/MACHINING OIL RESISTANT (PER QUABBIN TEST REPORT #TR 08-0001)		
(6 MONTHS @ 20°C)		
TENSILE STRENGTH RETENTION, NOM.	80%	
ELONGATION RETENTION, NOM.	100%	

3) ELECTRICAL CHARACTERISTICS:
SEE PAGE 2


4) AGENCY APPROVALS:
 NEC (UL) TYPE PLTC
 NEC (UL) TYPE CL3
 UL AWM 2463
 EU CE MARK: MEETS EU DIRECTIVE 2011/65/EU (RoHS II)

5) APPLICATION:
 PATCH CABLE FOR PROFINET TYPE B AND C AND ETHERNET/IP CAT 5e APPLICATIONS.

6) PRINT:
 QUABBIN DATAMAX INDUSTRIAL PROFINET TYPE B AND C CAT 5E SHIELDED P/N 5094 -- (UL) TYPE PLTC OR CL3 4C 22 AWG SF/QUAD 75C SUNLIGHT RESISTANT OIL RES I & II OR AWM 2463 80C 600V -- CE RoHS -- **(LOT DESIGNATOR)**
(SEQUENTIAL FOOTAGE)

7) COLOR CODE:
 1. WHITE X 2. BLUE
 3. YELLOW X 4. ORANGE

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

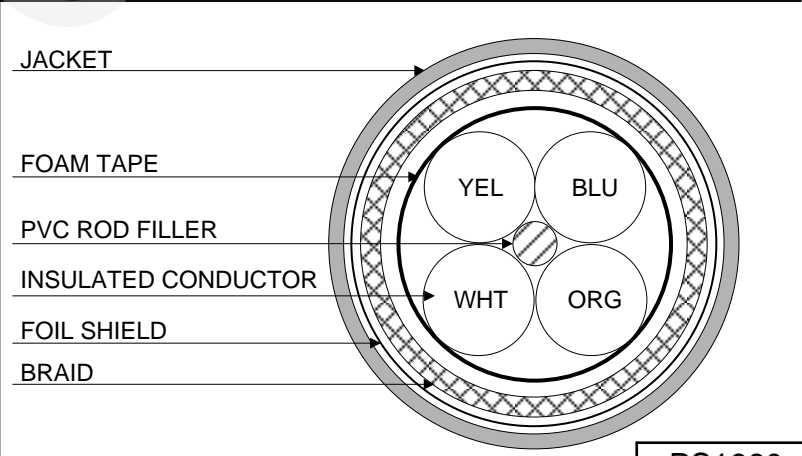

PS1660

Created 10/31/17	DRAWN: SGH 08/26/19
REV. 05	CHECKED: ZRS 08/26/19



TITLE
 QUAD, 22 AWG, PE/TPE SHIELDED PROFINET CABLE

CUSTOMER APPROVAL: _____ DATE: _____

QUABBIN P/N 5094 1 of 2

3) ELECTRICAL CHARACTERISTICS:

POE COMPLIANT TO 100 METERS WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184
 CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 100 METER LENGTH
 MUTUAL CAPACITANCE, MAX. 5.6 nF/100m AT 1 kHz @ 20°C
 DIELECTRIC WITHSTANDING, MIN. 2000V RMS
 VOLTAGE RATING, MAX. 600V
 D.C. RESISTANCE, MAX. (GRP I & GRP II) 17.5 Ω/1000' @ 20°C
 D.C. RESISTANCE UNBALANCE, MAX. 5% @ 20°C
 COUPLING ATTENUATION 30 ≤ f ≤ 100 MHz ≥ 60 dB MIN
 TESTED PER IEC 62153-4-9


NOTE: TESTING FOR THE FOLLOWING IS CONDUCTED OFF THE REEL. (FOR 100m OF CABLE)

IMPEDANCE, CHARACTERISTIC	1 ≤ f ≤ 100 MHz	100 ± 15 Ω
CAPACITANCE UNBALANCE, MAX.:		
PAIR-TO-GROUND	330 pF/100m AT 1 kHz @ 20°C	
RETURN LOSS	1 ≤ f < 10 MHz	20 + 5 LOG(f) dB MIN
	10 ≤ f < 20 MHz	25 dB MIN
	20 ≤ f ≤ 100 MHz	25 - 8.6 LOG(f/20) dB MIN
INSERTION LOSS	1 ≤ f ≤ 100 MHz	1.02(1.967 √f + 0.023(f) + 0.050/√f dB) MAX*
NEXT	1 ≤ f ≤ 100 MHz	35.3 - 15 LOG(f/100) dB MIN
ACRF	1 ≤ f ≤ 100 MHz	23.8 - 20 LOG(f/100) dB MIN
PROPAGATION DELAY	1 ≤ f ≤ 100 MHz	534 + 36/√f ns MAX
PROPAGATION DELAY SKEW	1 ≤ f ≤ 100 MHz	≤ 20 ns

*2% HIGHER THAN HORIZONTAL CABLE SPECIFICATION PER TIA 568-C.2.

CABLE MEETS THE CHANNEL REQUIREMENT AT 100M AND IS SUITABLE FOR 100M PLUG TO PLUG RUN.

PS1660

Created 10/31/17	DRAWN: SGH 08/26/19	
REV. 05	CHECKED: ZRS 08/26/19	
TITLE QUAD, 22 AWG, PE/TPE SHIELDED PROFINET CABLE		
QUABBIN P/N		5094
		2 of 2

CUSTOMER APPROVAL:

DATE: