

1) CONSTRUCTION:

CONDUCTOR:	24 AWG 7/32 STRANDED TINNED COPPER	NOM. DIA.	.024"
INSULATION:	HIGH DENSITY POLYETHYLENE, .007" NOM. WALL THICKNESS		.039" MAX
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS		.078"
CABLE:	(4) TWISTED PAIRS TWISTED TOGETHER AND WRAPPED WITH TISSUE TAPE TO FORM A CABLE CORE		.163"
JACKET:	POLYURETHANE, (COLOR, PER CHART 1) , .028" NOM. WALL THICKNESS (PRESSURE)	OVERALL CABLE DIAMETER	.240" .245" MAX.

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	75°C
TEMPERATURE RATING, MIN.	-40°C
WT./M', NOM., NET.	31.5 LBS.
UV RESISTANT JACKET	
BEND RADIUS	1" FOR STATIC BEND
FLEX LIFE	
(126 CYCLES/MIN @ 20°C)	1 MILLION CYCLE TEST (10X CABLE O.D., MINIMUM RADIUS) 10 MILLION CYCLE TEST (20X CABLE O.D., MINIMUM RADIUS)

CHART 1:

QUABBIN P/N	JACKET COLOR
5700	BLACK
5703	RED
5706	BLUE
5716	TEAL

3) ELECTRICAL CHARACTERISTICS:

SEE PAGE 2

4) AGENCY APPROVALS:

EU CE MARK: MEETS EU DIRECTIVE 2011/65/EU (RoHS II)

5) APPLICATION:

FOR APPLICATIONS REQUIRING A RUGGED PATCH CORD ASSEMBLY. MEETS CATEGORY 5e ASSEMBLY SPECIFICATIONS. ALSO FOR USE IN PLUG TO PLUG CHANNELS (NO JACKS OR HORIZONTAL CABLE). SEE ATTENUATION TABLE FOR EQUIVALENT CHANNEL LENGTH.

6) PRINT: (WHITE INK ON BLACK JACKET, ALL OTHERS BLACK INK)

QUABBIN DATAMAX EXTREME HIGH FLEX INDUSTRIAL ETHERNET PATCH CORD P/N **(P/N PER CHART 1)**
-- CE RoHS -- **(LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)**

7) COLOR CODE:

1. WHITE/BLUE X BLUE
2. WHITE/ORANGE X ORANGE
3. WHITE/GREEN X GREEN
4. WHITE/BROWN X BROWN


8) PUT UPS

AVAILABLE IN STANDARD 1000 FT REELS OR IN LONGER BULK PUTUPS

JACKET

TAPE

PAIR

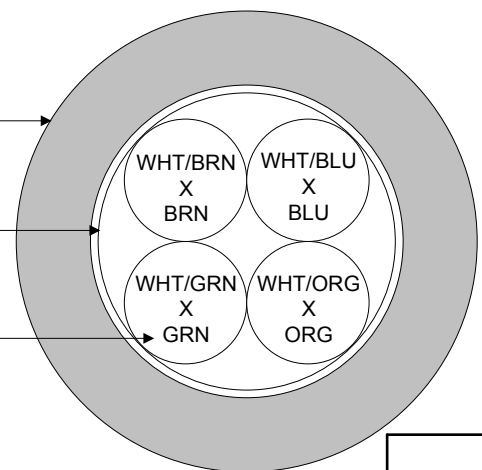

Created 05/19/14	DRAWN: SGH 09/26/18
REV. 03	CHECKED: ZRS 09/26/18



TITLE
DATAMAX EXTREME HIGH FLEX INDUSTRIAL ETHERNET PATCH CABLE - 4 PR

CUSTOMER APPROVAL:

DATE:

DRAWING # QWC0081

1 of 2

3) ELECTRICAL CHARACTERISTICS: (FOR 100m OF CABLE)

CAPACITANCE, MUTUAL, NOM. 13.5 PF/FT. AT 1 MHz
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS
 VOLTAGE RATING, MAX. 300V (MANUFACTURER'S RECOMMENDED)
 D.C. RESISTANCE, MAX. 14.0 Ω
 IMPEDANCE 100 ± 15 Ω 1-100 MHz; 100 ± 20 Ω 100-350 MHz

RETURN LOSS
 $1 \leq f < 10$ MHz 20 + 5 LOG(f) dB MIN
 $10 \leq f < 20$ MHz 25 dB MIN
 $20 \leq f \leq 100$ MHz 25 - 8.6 LOG($f/20$) dB MIN

NEXT
 $1 \leq f \leq 100$ MHz 35.3 - 15 LOG($f/100$) dB MIN

PSNEXT
 $1 \leq f \leq 100$ MHz 32.3 - 15 LOG($f/100$) dB MIN

ACRF
 $1 \leq f \leq 100$ MHz 23.8 - 20 LOG($f/100$) dB MIN

PSACRF
 $1 \leq f \leq 100$ MHz 20.8 - 20 LOG($f/100$) dB MIN

INSERTION LOSS (SEE BELOW)

DELAY
 $1 \leq f \leq 100$ MHz 534 + 36/ \sqrt{f} ns MAX

DELAY SKEW
 $1 \leq f \leq 100$ MHz <25 ns

LCL
 $1 \leq f \leq 100$ MHz -38 dB MIN

INSERTION LOSS:

FREQUENCY	SPEC 70M OF CABLE (CAT 5e CHANNEL)	INSERTION LOSS PER METER
1.0	2.5	.036
4.0	4.5	.064
8.0	6.3	.09
10.0	7.0	.1
16.0	9.2	.13
20.0	10.3	.15
25.0	11.4	.16
31.25	12.8	.18
62.5	18.5	.26
100.0	24.0	.343

NOTE: ALL TESTING IS CONDUCTED OFF THE REEL.

CUSTOMER APPROVAL:

DATE:

Created 05/19/14	DRAWN: SGH 09/26/18	
REV. 03	CHECKED: ZRS 09/26/18	
TITLE DATAMAX EXTREME HIGH FLEX INDUSTRIAL ETHERNET PATCH CABLE – 4 PR		
DRAWING #		QWC0081
		2 of 2