

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 19/.0058 STRANDED TINNED COPPER	.0280"
INSULATION:	HIGH DENSITY POLYETHYLENE, .014" NOM. WALL THICKNESS	.057"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS	.114"
CABLE:	(4) TWISTED PAIRS TWISTED TOGETHER AND WRAPPED WITH A FOAM POLYPROPYLENE TAPE TO FORM A CABLE CORE.	.250"
SHIELDS:	AN OVERALL SHIELD OF 38 AWG TINNED COPPER BRAID (75% MINIMUM COVERAGE), SHALL BE APPLIED OVER THE CABLE CORE. A SECOND SHIELD OF ALUMINIZED POLYESTER FOIL (FOIL IN, 100% COVERAGE) SHALL BE APPLIED OVER THE BRAID.	.272"
JACKET:	THERMOPLASTIC ELASTOMER, TEAL, .041" NOM. WALL THICKNESS (PRESSURE) OVERALL CABLE DIAMETER	.354" ± .010" (BY CALIPER)

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	75°C & 80°C (JACKET 105°C, 75°C OIL)
TEMPERATURE RATING, MIN.	-40°C (MANUFACTURER'S RECOMMENDED)
WT./M', NOM., NET.	59.7 LBS.
JACKET IS WELD SPATTER RESISTANT	
JACKET IS SUNLIGHT RESISTANT	
JACKET IS CUTTING/MACHINING OIL RESISTANT (PER QUABBIN TEST REPORT #TR 08-0001) (6 MONTHS @ 20°C)	
TENSILE STRENGTH RETENTION, NOM.	80%
ELONGATION RETENTION, NOM.	100%
FLEX LIFE (PENDING)	1 MILLION CYCLE TEST (10X CABLE O.D., MINIMUM RADIUS)
(126 CYCLES/MIN, @ 20°C)	10 MILLION CYCLE TEST (20X CABLE O.D., MINIMUM RADIUS)
TORSION TEST (PENDING)	3 MILLION CYCLE TEST
(1 LB LOAD, 360°, 71 CYCLES/MIN, @ 20°C)	

3) ELECTRICAL CHARACTERISTICS:
SEE PAGE 2


4) AGENCY APPROVALS:
UL AWM STYLE 2463 (80C 600V)
NEC (UL) TYPE PLTC
NEC (UL) TYPE ITC
EU CE MARK: MEETS EU DIRECTIVE 2011/65/EU (RoHS II)

5) APPLICATION:
PATCH CABLE FOR CAT 5e APPLICATIONS REQUIRING A RUGGED PATCH CORD ASSEMBLY. U.S. PATENT NO. US 8,487,184 B2

6) PRINT:
QUABBIN DATAMAX EXTREME HIGH FLEX INDUSTRIAL ETHERNET/IP PATCH CORD CAT 5e SF/UTP P/N 5921 -- U.S. PATENT NO. US 8,487,184 B2 -- (UL) PLTC 4PR 22 AWG 75C SUNLIGHT RESISTANT OIL RES I & II OR ITC OR AWM 2463 80C 600V -- CE RoHS -- **(LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)**

7) COLOR CODE:
1. BLUE X WHITE/BLUE
2. ORANGE X WHITE/ORANGE
2 GREEN/WHITE X WHITE/GREEN
4. BROWN X WHITE/BROWN

8) PACKAGING:
TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

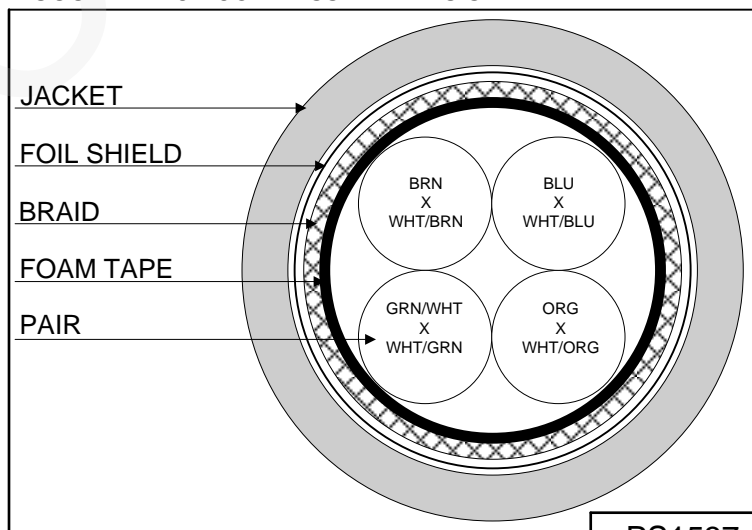

PS1537

Created 10/23/13	DRAWN: SGH 10/18/19
REV. 06	CHECKED: ZRS 10/18/19



TITLE DATAMAX EXTREME INDUSTRIAL ETHERNET/IP CABLE -- 4 PR -- STYLE 2463, TYPE PLTC, TYPE ITC -- CAT 5e	
QUABBIN P/N	5921
1 of 2	

CUSTOMER APPROVAL: _____ DATE: _____

3) ELECTRICAL CHARACTERISTICS:

POE COMPLIANT TO 100 METERS WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184	
CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 100 METER LENGTH	
CAPACITANCE, MUTUAL, NOM.	13.5 PF/FT. AT 1 MHz
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	600V
D.C. RESISTANCE, MAX.	15.9 Ω /1,000' @ 20°C

NOTE: TESTING FOR THE FOLLOWING IS CONDUCTED OFF THE REEL. (FOR 100m OF CABLE)

IMPEDANCE	100 \pm 15 Ω 1 – 100 MHz	
RETURN LOSS	1 \leq f < 10 MHz	20 + 6 LOG(f) dB MIN*
	10 \leq f < 20 MHz	26 dB MIN*
	20 \leq f \leq 100 MHz	26 – 5 LOG(f/20) dB MIN*
PS NEXT	1 \leq f \leq 100 MHz	32.3 – 15 LOG(f/100) dB MIN
NEXT	1 \leq f \leq 100 MHz	35.3 – 15 LOG(f/100) dB MIN
PSACRF	1 \leq f \leq 100 MHz	20.8 – 20 LOG(f/100) dB MIN
ACRF	1 \leq f \leq 100 MHz	23.8 – 20 LOG(f/100) dB MIN
INSERTION LOSS	1 \leq f \leq 100 MHz	1.02[1.967 \sqrt{f} + 0.023(f) + 0.050/ \sqrt{f}] + 4*0.040 \sqrt{f} dB MAX
DELAY	1 \leq f \leq 100 MHz	534 + 36/ \sqrt{f} ns MAX
DELAY SKEW (ORG X WHT/ORG, GRN/WHT X WHT/GRN PAIRS) (BLU X WHT/BLU, BRN X WHT/BRN PAIRS)	1 \leq f \leq 100 MHz	\leq 20 ns Per IEC 61156-5
		< 45 ns
COUPLING ATTENUATION	30 \leq f \leq 100 MHz	\geq 60 dB E3*
VELOCITY OF PROPAGATION	69%	

*PER ODVA VOLUME 2 ETHERNET/IP

PS1537

Created 10/23/13	DRAWN: SGH 10/18/19
REV. 06	CHECKED: ZRS 10/18/19



TITLE

CUSTOMER APPROVAL:

DATE:

DATAMAX EXTREME INDUSTRIAL ETHERNET/IP CABLE
-- 4 PR -- STYLE 2463, TYPE PLTC, TYPE ITC -- CAT 5e

QUABBIN P/N

5921

2 of 2