

1) CONSTRUCTION:
 CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER NOM. DIA. .038"
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS .064"
 CABLE: (12) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE .260"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .035" NOM. WALL THICKNESS OVERALL CABLE DIAMETER .330"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 75.7 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL NOM. 24 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 10.4 Ω/1000'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464


5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 6120R (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
 1. BLACK
 2. WHITE
 3. RED
 4. GREEN
 5. BROWN
 6. BLUE
 7. ORANGE
 8. YELLOW
 9. VIOLET
 10. GRAY
 11. PINK
 12. TAN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

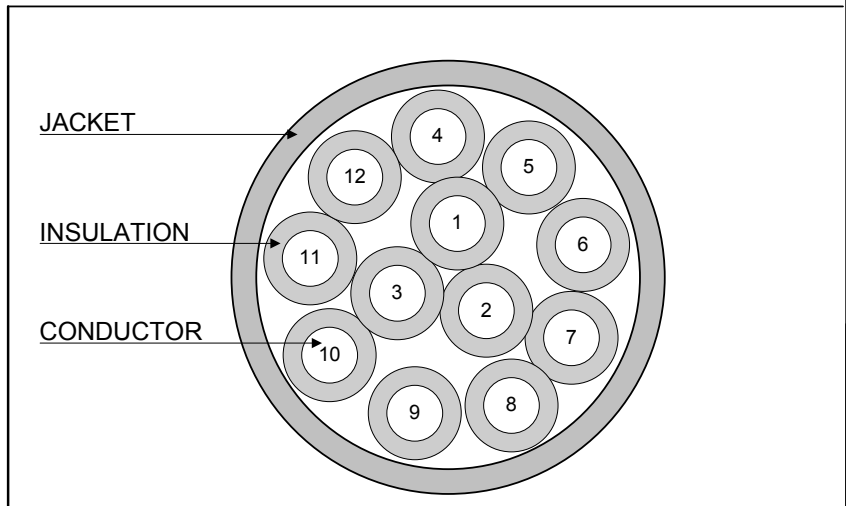

REVISION 01	DATE:	DRAWN <i>B. Duczynski</i> 6/22/09	
REVISED BY		CHECKED <i>G. Munro</i> 06/22/09	
CHECKED		CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 12/C 20 AWG PVC/PVC CABLE – TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 6120 1 OF 1