

1) CONSTRUCTION: NOM. DIA.
 CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER .038"
 INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS .064"
 CABLE: (15) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE .300"
 CORE .300"
 JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .035" NOM. WALL THICKNESS .370"
 OVERALL CABLE DIAMETER .370"

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 94.6 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL NOM. 26 PF/FT.
 DIELECTRIC WITHSTANDING, MIN. 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. 10.4 Ω/1,000'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 UL STYLE 2464
 CSA AWM FT4

5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 6125 (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
1. BLACK
 2. WHITE
 3. RED
 4. GREEN
 5. ORANGE
 6. BLUE
 7. WHITE/BLACK
 8. RED/BLACK
 9. GREEN/BLACK
 10. ORANGE/BLACK
 11. BLUE/BLACK
 12. BLACK/WHITE
 13. RED/WHITE
 14. GREEN/WHITE
 15. BLUE/WHITE

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

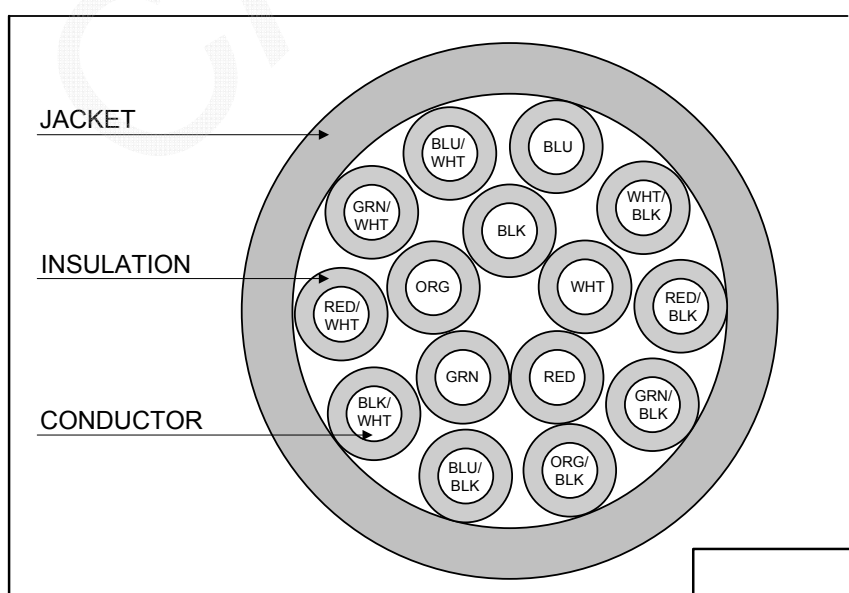

Created 09/03/99	DRAWN: BMD 03/11/15	
REV. 04	CHECKED: GBM 03/11/15	
TITLE 15/C 20 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	6125	1 of 1

CUSTOMER APPROVAL: _____ DATE: _____