

1) CONSTRUCTION:	NOM. DIA.
CONDUCTOR: 20 AWG 7/28 STRANDED TINNED COPPER	.038"
INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .013" NOM. WALL THICKNESS	.064"
PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS	.128"
CABLE: (3) PAIRS TWISTED TOGETHER TO FORM A CABLE CORE.	.200"
JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	.264"
OVERALL CABLE DIAMETER	

2) PHYSICAL PROPERTIES:
 TEMPERATURE RATING, MAX. 60°C & 80°C
 WT./M', NOM., NET. 45.0 LBS.

3) ELECTRICAL CHARACTERISTICS:
 CAPACITANCE, MUTUAL, NOM 26 PF/FT.
 DIELECTRIC WITHSTANDING, MIN 1500V RMS
 VOLTAGE RATING, MAX. 300V
 D.C. RESISTANCE, MAX. PER ASTM B286 10.4 Ω/1,000'


4) AGENCY APPROVALS:
 NEC (UL) TYPE CM
 UL AWM STYLE 2464
 CSA AWM FT4


5) APPLICATION:
 INSTRUMENTATION, AUDIO, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN P/N 6135R (UL) TYPE CM 20 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 --
 RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. BLACK X RED
 2. BLACK X WHITE
 3. BLACK X GREEN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING.

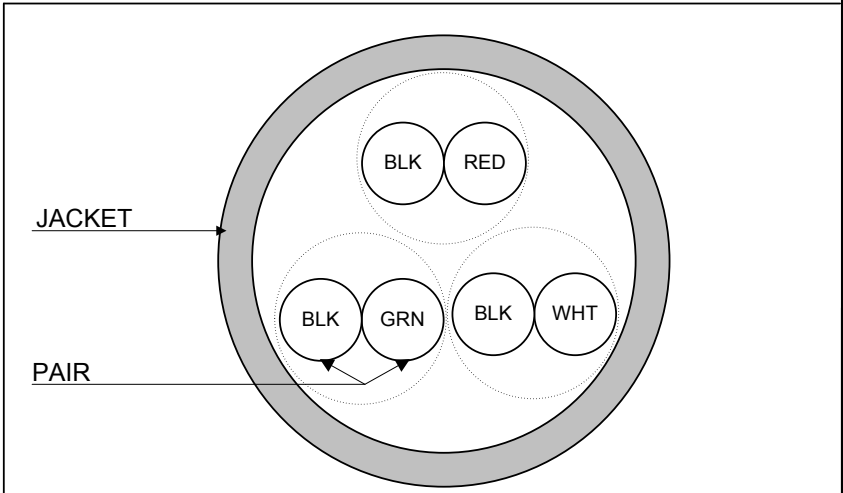

REVISION 02	DATE:	DRAWN S. ADDIE 4/21/97	
REVISED BY B. Duczynski	11/30/09	CHECKED J. RIVERNIDER 4/24/97	
CHECKED G. MUMFORD	12/01/09	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 6/C (3 PR.) 20 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, AWM FT4
			QUABBIN P/N 6135 1 OF 1