

1) CONSTRUCTION:

CONDUCTOR:	20 AWG 7/28 STRANDED TINNED COPPER	NOM. DIA.	.038"
INSULATION:	POLYETHYLENE, .016" NOM. WALL THICKNESS		.070"
CABLE:	COLOR CODED SINGLES TWISTED TOGETHER WITH AN ALUMINUM POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) AND A 20 AWG STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION.		.143"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .028" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.199"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 75°C
WT./M', NOM., NET.	23.3 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	27 PF/FT
CAPACITANCE, GROUNDED, NOM.	51 PF/FT
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	10.4 Ω/1000'

4) AGENCY APPROVALS:

NEC (UL) TYPE CM  
 CSA TYPE CMG  
 UL STYLE 2092

5) APPLICATION:

INSTRUMENTATION, SOUND, AND BROADCAST CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:


QUABBIN 6140 (UL) TYPE CM 20 AWG 75C SHIELDED OR AWM 2092 -- CSA LL51726 TYPE CMG 60C -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:

1. CLEAR
2. BLACK

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

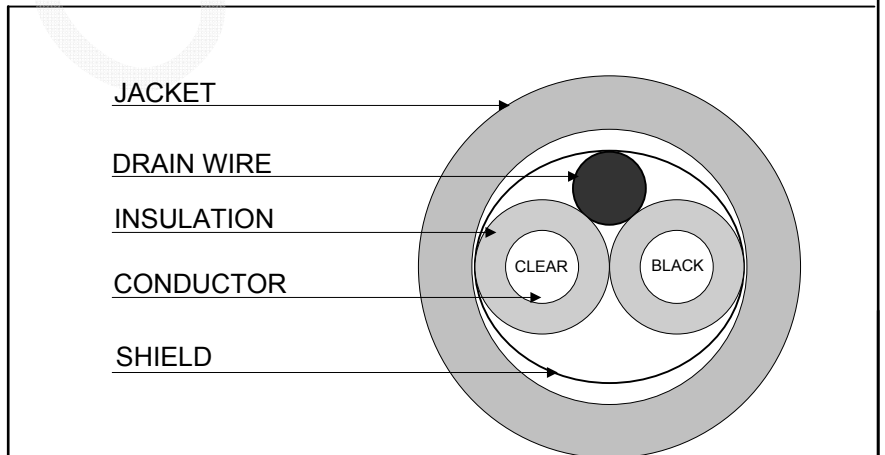

CUSTOMER APPROVAL:

DATE:

Created 09/21/95	DRAWN: SGH 05/24/18	
REV. 08	CHECKED: ZRS 05/24/18	
TITLE 2/C 20AWG PE/PVC CABLE --TYPE CM, STYLE 2092, CSA TYPE CMG		
QUABBIN P/N	6140	1 of 1