


- 1) CONSTRUCTION:
- | | | | |
|-------------|--|------------------------|-------|
| CONDUCTOR: | 22 AWG 7/30 STRANDED TINNED COPPER | NOM. DIA. | .030" |
| INSULATION: | POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS | | .050" |
| CABLE: | (9) INSULATED CONDUCTORS TWISTED TOGETHER WITH FILLER TO FORM A CABLE CORE | | .182" |
| JACKET: | POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS | OVERALL CABLE DIAMETER | .246" |
- 2) PHYSICAL PROPERTIES:
- | | |
|--------------------------|-------------|
| TEMPERATURE RATING, MAX. | 60°C & 80°C |
| TEMPERATURE RATING, MIN. | -20°C |
| WT./M', NOM., NET. | 42.2 LBS. |
- 3) ELECTRICAL CHARACTERISTICS:
- | | |
|---|---------------|
| CAPACITANCE, MUTUAL DIELECTRIC WITHSTANDING, MIN. | 28 PF/FT. |
| VOLTAGE RATING, MAX. | 1500V RMS |
| D.C. RESISTANCE, MAX. PER ASTM B286 | 300V |
| | 16.7 Ω/1,000' |
- 4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464 80C 300V
- 5) APPLICATION:
 RS232 COMPUTER INTERCONNECT, CONTROL AND SOUND CABLE. RoHS COMPLIANT MATERIALS.
- 6) PRINT:
 QUABBIN 7150 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)
- 7) COLOR CODE:
1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE
 6. BLUE
 7. BROWN
 8. YELLOW
 9. VIOLET

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

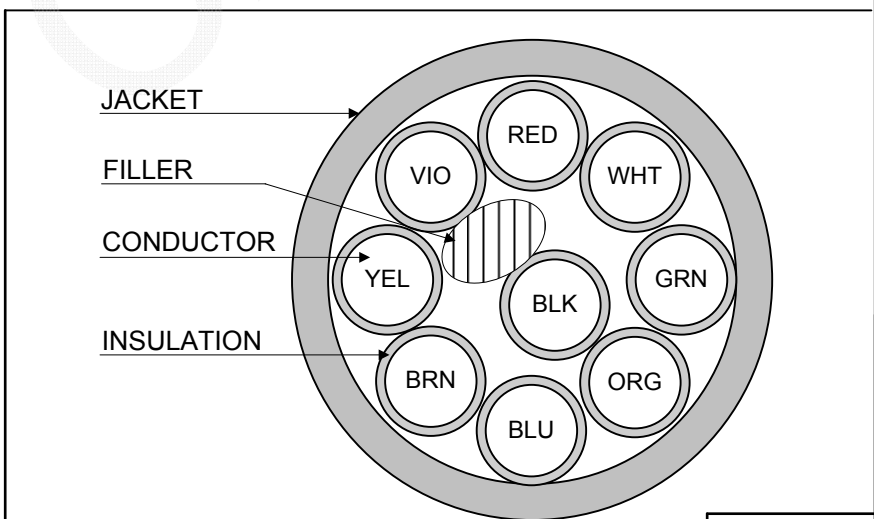

CUSTOMER APPROVAL:

DATE:

Created 08/08/96	DRAWN: SGH 08/03/18	
REV. 05	CHECKED: ZRS 08/03/18	
TITLE 9/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7150	1 of 1