

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG SOLID TINNED COPPER	.0254"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.045"
PAIR:	COLOR CODED SINGLES TWISTED INTO PAIRS	.090"
CABLE:	(2) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE	.133"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	
	OVERALL CABLE DIAMETER	.197"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	20.9 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM	25 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	17.2 Ω/1,000'

4) AGENCY APPROVALS:

- NEC (UL) TYPE CM
- UL AWM STYLE 2464
- CSA AWM FT4

5) APPLICATION:

CONTROL AND SOUND INTERCONNECT CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:


QUABBIN 7205R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 – RoHS –
(LOT DESIGNATOR)

7) COLOR CODE:

1. BLACK X RED
2. BLACK X WHITE

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

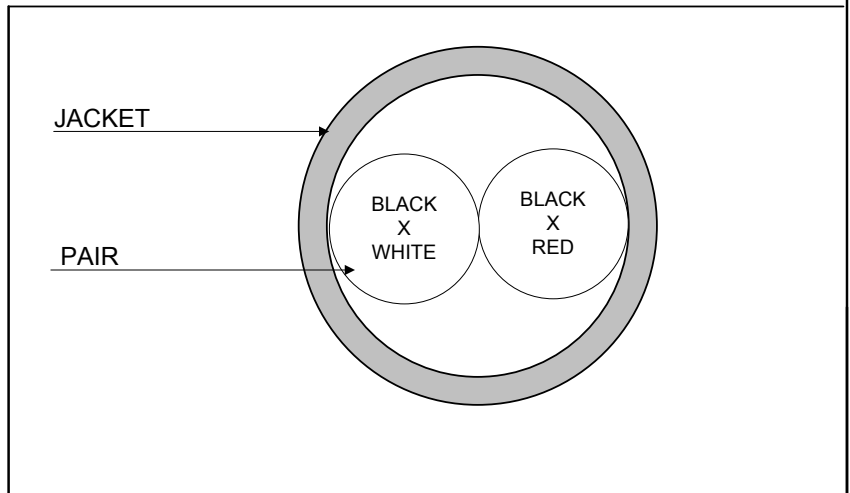

REVISION 02	DATE:	DRAWN	S. ADDIE 4/15/09	
REVISED BY	<i>B. Duceyuski</i> 4/15/09	CHECKED	J. RIVERNIDER 4/15/09	
CHECKED	<i>G. Munn</i> 04/16/09	CHECKED		
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE 4/C 2 PR. 22 AWG PVC/PVC – TYPE CM, STYLE 2464, CSA AWM FT4
				QUABBIN P/N 7205 1 OF 1