

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR: 22 AWG SOLID TINNED COPPER,		.0254"
INSULATION: SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.045"
PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS		.090"
CABLE: (8) TWISTED PAIRS CABLED TOGETHER TO FORM A CABLE CORE.		.224"
JACKET: POLYVINYLCHLORIDE, CHROME GRAY, .035" NOM. WALL THICKNESS		
	OVERALL CABLE DIAMETER	.294"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	62.9 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	24 PF/FT
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	17.2 Ω/1000'

4) AGENCY APPROVALS:

- NEC (UL) TYPE CM
- UL AWM STYLE 2464
- CSA AWM FT4

5) APPLICATION:

RoHS COMPLIANT MATERIALS


6) PRINT:

QUABBIN 7227R (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --
(LOT DESIGNATOR)

- 7) COLOR CODE:
1. BLACK X RED
 2. BLACK X WHITE
 3. BLACK X GREEN
 4. BLACK X BLUE
 5. BLACK X YELLOW
 6. BLACK X BROWN
 7. BLACK X ORANGE
 8. RED X WHITE

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

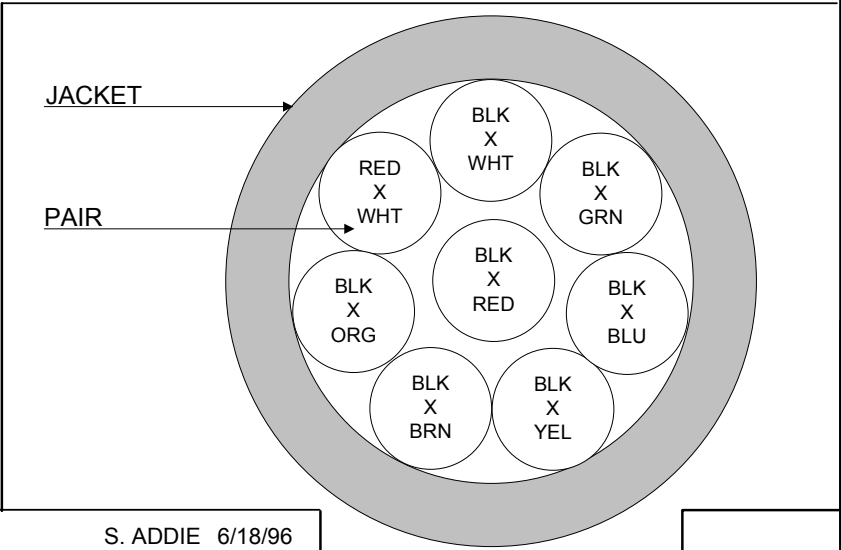

REVISION 02	DATE:	DRAWN S. ADDIE 6/18/96
REVISED BY B. Duczynski	5/21/10	CHECKED J. RIVERNIDER 6/18/96
CHECKED G. Munn	05/21/10	CHECKED M. FERRERO 6/18/96
CHECKED		CUSTOMER APPROVAL: DATE:

QUABBIN®
WIRE & CABLE

TITLE
16/C 8 PR. 22 AWG PVC/PVC CABLE --
TYPE CM, STYLE 2464, AWM FT4

QUABBIN P/N **7227** 1 OF 1