

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	.030"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.050"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS	.100
CABLE:	(6) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE	.255"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .319"

2) PHYSICAL PROPERTIES:	
TEMPERATURE RATING, MAX.	60°C & 80°C
TEMPERATURE RATING, MIN.	-20°C
WT./M', NOM., NET.	52.0 LBS.

3) ELECTRICAL CHARACTERISTICS:	
CAPACITANCE, MUTUAL, NOM.	15 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 Ω/1000'


- 4) AGENCY APPROVALS:  
 (UL) NEC TYPE CM  
 CSA AWM FT4  
 UL STYLE 2464

5) APPLICATION:  
 CONTROL AND SOUND INTERCONNECT CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
 QUABBIN 7275 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

- 7) COLOR CODE:  
 1. BLACK X RED  
 2. BLACK X WHITE  
 3. BLACK X GREEN  
 4. BLACK X BLUE  
 5. BLACK X YELLOW  
 6. BLACK X BROWN

8) PACKAGING:  
 TO BE PACKAGED AS PER QWC'S  
 STANDARD PACKAGING

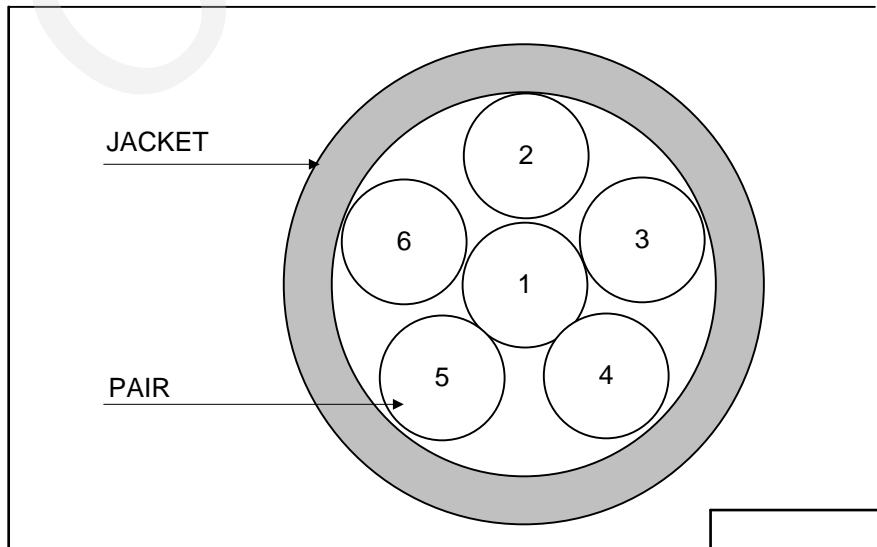

Created 5/26/99	DRAWN: BMD 11/04/15	
REV. 04	CHECKED: GBM 11/04/15	
TITLE 6 PR. 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7275	1 of 1

CUSTOMER APPROVAL:

DATE: