

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS		.100"
CABLE:	(19) TWISTED PAIRS TWISTED TOGETHER WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE		.408"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .035" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.478"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	141.8 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	15 PF/FT.
DIELECTRIC WITHSTANDING, MIN.	2000V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER AST B286	16.7 Ω/1,000'

4) AGENCY APPROVALS:


- UL AWM STYLE 2464
- NEC (UL) TYPE CM
- CSA AWM FT4

5) APPLICATION:  
CONTROL AND SOUND INTERCONNECT CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:  
QUABBIN 7295 (UL) TYPE CM 22 AWG OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS --  
**(LOT DESIGNATOR)**

- 7) COLOR CODE:
1. BLACK X RED
  2. BLACK X WHITE
  3. BLACK X GREEN
  4. BLACK X BLUE
  5. BLACK X YELLOW
  6. BLACK X BROWN
  7. BLACK X ORANGE
  8. RED X WHITE
  9. RED X GREEN
  10. RED X BLUE
  11. RED X YELLOW
  12. RED X BROWN
  13. RED X ORANGE
  14. GREEN X WHITE
  15. GREEN X BLUE
  16. GREEN X YELLOW
  17. GREEN X BROWN
  18. GREEN X ORANGE
  19. WHITE X BLUE

8) PACKAGING:  
TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

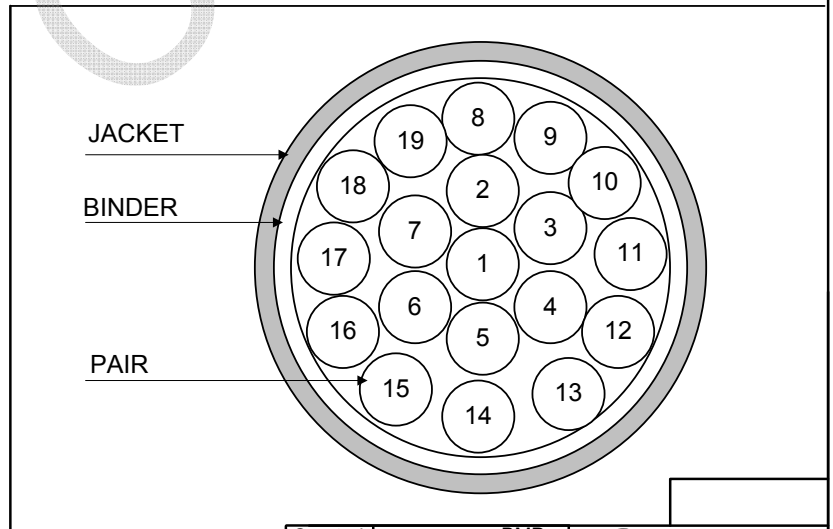

CUSTOMER APPROVAL:

DATE:

Created 5/26/99	DRAWN: BMD 10/17/12	
REV. 03	CHECKED: GBM 10/18/12	
TITLE 19 PR. 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4		
QUABBIN P/N	7295	1 of 1