

1) CONSTRUCTION:

CONDUCTOR:	22 AWG SOLID TINNED COPPER	NOM. DIA.	.025"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE .013" NOM. WALL THICKNESS		.051"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS		.102"
CABLE:	(2) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE		.153
SHIELD:	AN ALUMINUM POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND SHALL INCLUDE A 22 AWG STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE.		.156"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.220"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	26.9LBS.
SUNLIGHT RESISTANT JACKET MEETS REQUIREMENTS OF UL SUBJECT 13 PARA 26	

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	35 PF/FT.
CAPACITANCE, GROUNDED, NOM.	50 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	17.2 Ω/M'

4) AGENCY APPROVALS:

UL AWM STYLE 2464 80C 300V
(UL) NEC TYPE CM
CSA AWM FT4

5) APPLICATION:

INSTRUMENTATION, AUDIO, BROADCAST, AND COMPUTER INTERCONNECT CABLE.
RoHS COMPLIANT MATERIALS.

6) PRINT:


QUABBIN 7350R (UL) TYPE CM 22 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4
-- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:

1. BLACK X RED
2. BLACK X WHITE

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S
STANDARD PACKAGING

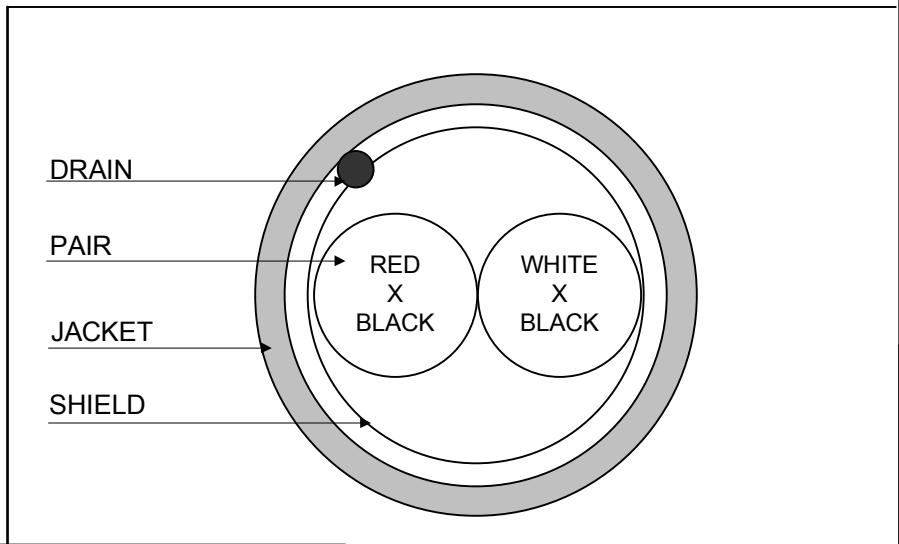

REVISION 02	DATE:	DRAWN S. ADDIE 6/27/97	
REVISED BY B. Duczynski	7/12/07	CHECKED J. RIVERNIDER 6/27/97	
CHECKED J. Rucmber	7/13/07	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 2 PR. 22 AWG PVC/PVC CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 7350 1 OF 1