

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	POLYETHYLENE, .012" NOM. WALL THICKNESS		.054"
PAIRS:	COLOR CODED SINGLES TWISTED INTO PAIRS		.108"
SHIELD:	EACH PAIR SHALL BE COVERED WITH AN ALUMINIZED POLYESTER FOIL SHIELD (FOIL IN, 100% COVERAGE) AND CONTAIN A 22 AWG STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE. SHIELDS SHALL BE ISOLATED BY AN EDGE FREE TAPE		.111"
CABLE:	6 TWISTED PAIRS CABLED TOGETHER, WRAPPED WITH A CLEAR POLYESTER BINDER TO FORM A CABLE CORE.		.308"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL		.372"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	75°C & 80°C
WT./M', NOM., NET.	75.6 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	30 PF/FT.
CAPACITANCE, GROUNDED, NOM.	55 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	30V (300V PER TYPE CM)
D.C. RESISTANCE, MAX.	16.7 Ω/M'


4) AGENCY APPROVALS:
 UL AWM STYLE 2919
 (UL) NEC TYPE CM
 C(UL) CM


5) APPLICATION:
 CONTROL AND COMPUTER INTERCONNECT CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7405R TYPE CM (UL) C(UL) 22 AWG 75C SHIELDED OR AWM 2919 -- LOW VOLTAGE COMPUTER CABLE -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. BLACK X RED
 2. BLACK X WHITE
 3. BLACK X GREEN
 4. BLACK X BLUE
 5. BLACK X YELLOW
 6. BLACK X BROWN

8) PACKAGING:
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING.

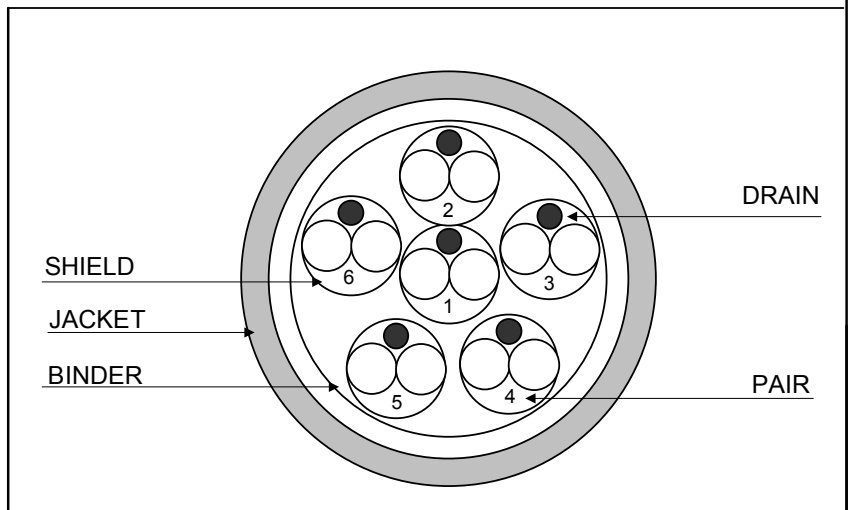

REVISION 03	DATE:	DRAWN S. ADDIE 09/21/95	
REVISED BY	<i>B. Duceyuski</i> 1/5/07	CHECKED J. RIVERNIDER 09/21/95	
CHECKED	<i>J. Rivernider</i> 1/5/07	CHECKED M. FERRERO 09/22/95	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 6 PR. 22 AWG PE/PVC CABLE -- TYPE CM (UL) C(UL) , STYLE 2919
			QUABBIN P/N 7405 1 OF 1