


- 1) CONSTRUCTION:
- | | | | |
|-------------|--|------------------------|-------|
| CONDUCTOR: | 22 AWG 7/30 STRANDED TINNED COPPER | NOM. DIA. | .030" |
| INSULATION: | POLYVINYLCHLORIDE, .016" NOM. WALL THICKNESS | | .062" |
| CABLE: | (2) COLOR CODED SINGLES TWISTED TOGETHER TO FORM A CABLE CORE. | | .124" |
| SHIELD: | ALUMINIZED POLYESTER FOIL SHIELD (FOIL OUT, 100% COVERAGE) WITH A 22 AWG 7/30 STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION. | | .127" |
| JACKET: | POLYVINYLCHLORIDE, CHROME, .020" NOM. WALL THICKNESS | OVERALL CABLE DIAMETER | .167" |
- 2) PHYSICAL PROPERTIES:
- | | |
|--------------------------|-----------|
| TEMPERATURE RATING, MAX. | 105°C |
| TEMPERATURE RATING, MIN. | -20°C |
| WT./M', NOM., NET. | 15.5 LBS. |
| JACKET IS UV RESISTANT | |
- 3) ELECTRICAL CHARACTERISTICS:
- | | |
|-------------------------------|-----------|
| CAPACITANCE, MUTUAL, NOM. | 26 PF/FT. |
| CAPACITANCE, GROUNDED, NOM. | 48 PF/FT. |
| DIELECTRIC WITHSTANDING, MIN. | 2000V RMS |
| VOLTAGE RATING, MAX. | 300V |
| D.C. RESISTANCE, MAX. | 16.7 Ω |
- 4) AGENCY APPROVALS:
- UL AWM STYLE 2103
 - NEC (UL) TYPE CM
 - CEC C(UL) TYPE CM
 - CSA-C/US TYPE CMG
- 5) APPLICATION:
- RoHS COMPLIANT MATERIALS
- 6) PRINT:
- QUABBIN P/N 7516 C(UL)US TYPE CM 22 AWG SHIELDED 105C OR AWM 2103 -- CSA-C/US LL51726 TYPE CMG 105C -- RoHS -- **(LOT DESIGNATOR)**

- 7) COLOR CODE:
1. BLACK
 2. RED

- 8) PACKAGING
- TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

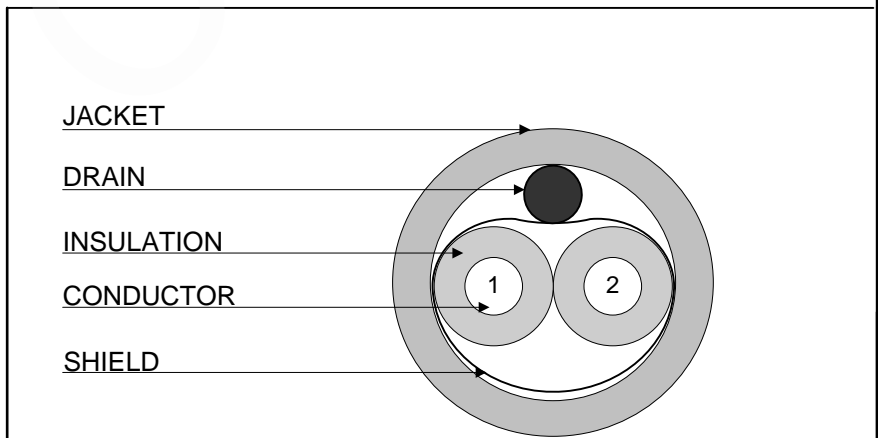

Created 09/03/20	DRAWN: BMD 09/03/20	
REV. 02	CHECKED: ZRS 09/04/20	
TITLE		
2/C 22 AWG PVC/PVC SHIELDED CABLE -- STYLE 2103, TYPE CM, CSA TYPE CMG		
QUABBIN P/N	7516	1 of 1

CUSTOMER APPROVAL:

DATE: