

1) CONSTRUCTION:		NOM. DIA.
CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	.030"
INSULATION:	LEAD FREE SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS	.050"
CABLE:	(6) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE.	.143"
SHIELD:	ALUMINIZED POLYESTER FOIL SHIELD, 100% COVERAGE WITH A 22 AWG STRANDED TINNED COPPER DRAIN WIRE CONTACTING THE METALIZED SURFACE FOR EASY TERMINATION.	.146"
JACKET:	LEAD FREE POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER .212"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	60°C & 80°C
WT./M', NOM., NET.	32.9 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL	37 PF/FT.
CAPACITANCE, GROUNDED	67 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 OHMS/M'

4) AGENCY APPROVALS:

- NEC (UL) TYPE CM
- (UL) AWM STYLE 2464 80C 300V
- CSA AWM FT4

5) APPLICATION:

COMMUNICATION, DATA, AND CONTROL CABLE. RoHS COMPLIANT MATERIALS.

6) PRINT:


QUABBIN 7535R (UL) TYPE CM 22 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:

1. BLACK
2. RED
3. WHITE
4. GREEN
5. ORANGE
6. BLUE

8) PACKAGING:

TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

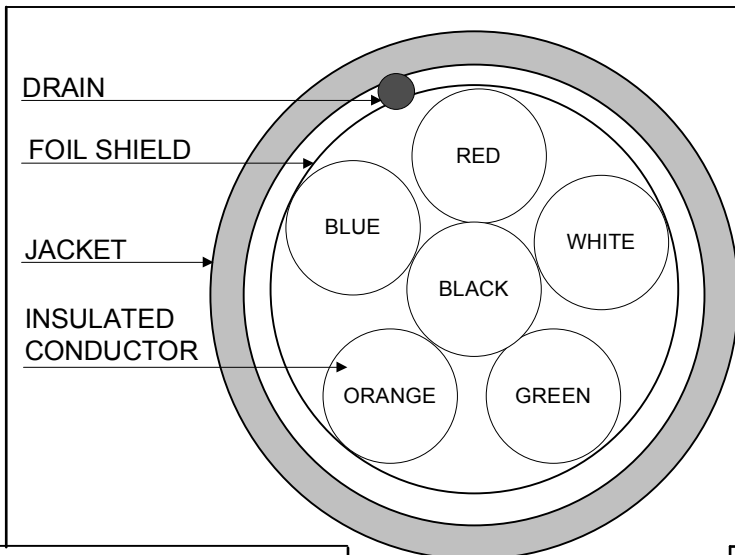

REVISION 03	DATE:	DRAWN	S. ADDIE 04/21/97	
REVISED BY	B. M. DUCZYNSKI 3/9/05	CHECKED	J. RIVERNIDER 04/21/97	
CHECKED	J. RIVERNIDER 3/8/05	CHECKED		
CHECKED		CUSTOMER APPROVAL:	DATE:	TITLE
				6/C 22 AWG PVC/PVC SHIELDED CABLE -- TYPE CM, STYLE 2464, CSA AWM FT4
				QUABBIN P/N 7535
				1 OF 1