

1) CONSTRUCTION:

CONDUCTOR:	22 AWG 7/30 STRANDED TINNED COPPER	NOM. DIA.	.030"
INSULATION:	SEMI-RIGID POLYVINYLCHLORIDE, .010" NOM. WALL THICKNESS		.050"
CABLE:	(7) INSULATED CONDUCTORS TWISTED TOGETHER TO FORM A CABLE CORE		.150"
SHIELD:	AN OVERALL ALUMINUM POLYESTER SHIELD (FOIL OUT, 100% COVERAGE) SHALL BE APPLIED OVER THE CABLE CORE AND SHALL INCLUDE A 22 AWG 7/30 STRANDED TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE.		.153"
JACKET:	POLYVINYLCHLORIDE, CHROME GRAY, .032" NOM. WALL THICKNESS	OVERALL CABLE DIAMETER	.217"

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX.	80°C
WT./M', NOM., NET.	35.7 LBS.

3) ELECTRICAL CHARACTERISTICS:

CAPACITANCE, MUTUAL, NOM.	37 PF/FT.
CAPACITANCE, GROUNDED, NOM.	68.5 PF/FT.
DIELECTRIC WITHSTANDING, MIN	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX. PER ASTM B286	16.7 OHMS/M'


4) AGENCY APPROVALS:
 (UL) NEC TYPE CM
 CSA AWM FT4
 UL STYLE 2464


5) APPLICATION:
 COMMUNICATION, DATA AND CONTROL CABLE
 RoHS COMPLIANT MATERIALS.

6) PRINT:
 QUABBIN 7540R (UL) TYPE CM 22 AWG SHIELDED OR AWM 2464 -- CSA LL51726 AWM I/II A/B 80C 300V FT4 -- RoHS -- **(LOT DESIGNATOR)**

7) COLOR CODE:
 1. BLACK
 2. RED
 3. WHITE
 4. GREEN
 5. ORANGE
 6. BLUE
 7. BROWN

8) PACKAGING
 TO BE PACKAGED AS PER QWC'S
 STANDARD PACKAGING

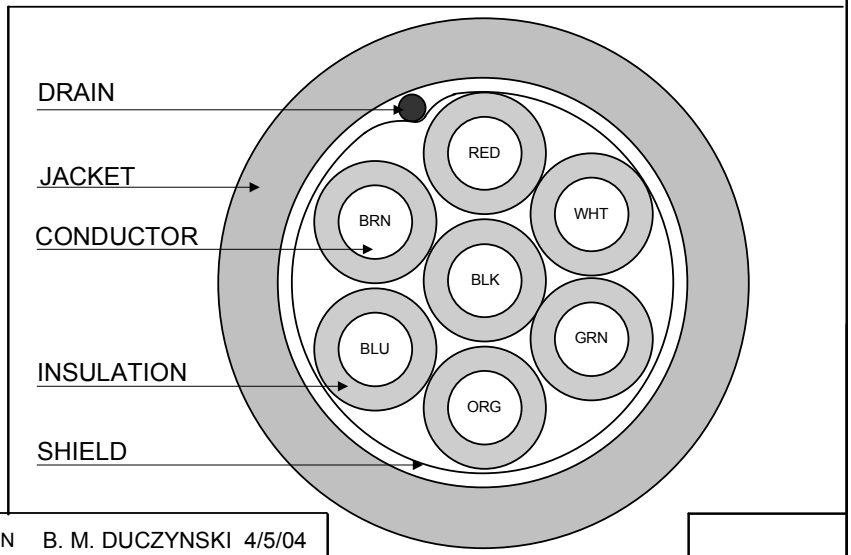

REVISION 02	DATE:	DRAWN B. M. DUCZYNSKI 4/5/04	
REVISED BY	B. M. DUCZYNSKI 2/15/06	CHECKED J. RIVERNIDER 4/5/04	
CHECKED	J. RIVERNIDER 2/15/06	CHECKED	
CHECKED		CUSTOMER APPROVAL: DATE:	TITLE 7/C 22 AWG PVC/PVC CABLE --TYPE CM, STYLE 2464, CSA AWM FT4
			QUABBIN P/N 7540 1 OF 1