



## True Carol Equals in Stock

Carol PN	Quabbin PN
C0434	0195
C0435	0140
C0436	0200
C0450	0160
C0452	0165
C0453	0220
C0454	0170
C0455	0225
C0762	7525
C0763	7535
C0910	8604
C1340	7465
C1352	7395
C1353	7455
C2404	4100
C2405	3130
C2409	2115
C2412	4120
C2420	4105
C2421	4110
C2422	4115
C2423	4125
C2424	4130
C2433	4135

Carol PN	Quabbin PN
C2513	8100
C2514	7320
C2516	7315
C2524	6140
C2526	7325
C2528	6145
C2534	4165
C2535	4170
C2536	3135
C2537	3140
C2543	4175
C2830	4140
C4062	7121
C4063	7125
C4064	7131
C4065	7145
C4066	7136
C4067	7160
C4070	7150
C4071	7155
C4088	7140
C6101	4560
C6351	6130
C6353	6100

- ◆ Quabbin stocks many other products
- ◆ Full catalog available on CD
- ◆ Check the web site at [www.quabbin.com](http://www.quabbin.com) for a rep near you

Call our Sales Service Department  
800-368-3311



## We Can Build Your Custom Cables

### Copper Conductors

8 AWG to 30 AWG  
Tinned, silver plated, or bare  
Solid or stranded

### Insulation Materials

Various types polyvinylchloride (PVC)  
High or low density polyethylene (PE)  
Polypropylene (PP)  
Foam polypropylene (FPP)  
Foam polyethylene (FPE)  
Various types thermoplastic elastomers (TPE)  
Composite or dual-layer

### Cable Constructions

Maximum size...1" outside diameter  
Multi-conductor...2 to 75 conductors  
Multi-pair...2 to 50 pairs  
Small diameter coaxial  
Round, oval, or shotgun cross-sections  
Hybrid mixture of components

### Cable Packaging

Wooden reels...14" to 42"  
Metal spools...6 1/2" to 10 1/2" (spools packed in cartons)  
Plastic 12" reels  
Pull boxes  
"Reel-in-a-Box"

### Color Coding or Identification

Spiral colored stripes  
Imprinted numbers or legend  
Longitudinal colored stripes  
Printed tape wraps

### Jacket Materials




Various types polyvinylchloride (PVC)  
Polyethylene (PE)  
Various types polyurethane (PUR)  
Various types thermoplastic elastomers (TPE)  
Low smoke/Zero halogen (LSZH)  
Lead-Free

### Shielding and Tape Types

Aluminum polyester foil with drain wire  
Foil-free edge aluminum polyester for isolated shields  
Braided or served copper wires (Typically 34 – 40 AWG)  
Jacket-bonded foil tapes  
Clear polyester or nylon tape  
Woven or fabric tapes  
Low smoke/Zero halogen foil and binder tapes

### Filler Material

Solid poly rods  
Fibrous poly  
Rope or cords  
Strength members

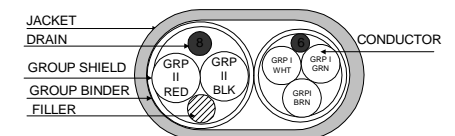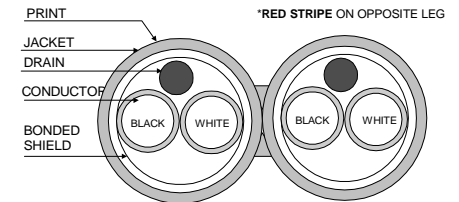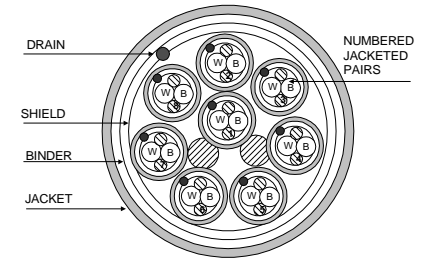

Call our Sales Service Department  
800-368-3311