

1) CONSTRUCTION:

CONDUCTOR: 26 AWG 7/34 STRANDED TINNED COPPER
 INSULATION: FOAMED FEP, .010" NOM. WALL THICKNESS
 PAIRS: COLOR CODED SINGLES TWISTED INTO PAIRS
 CABLE: (4) TWISTED PAIRS TWISTED TOGETHER TO FORM A CABLE CORE
 SHIELD: AN ALUMINUM POLYESTER ALUMINUM FOIL SHIELD (100% COVERAGE) WITH 7 ENDS OF 34 AWG TINNED COPPER DRAIN WIRE IN CONTACT WITH THE METALIZED SURFACE SHALL BE APPLIED OVER THE CABLE CORE.
 JACKET: POLYVINYLCHLORIDE, (COLOR, PER CHART 1), .021" NOM. WALL THICKNESS
 OVERALL CABLE DIAMETER

NOM. DIA.
 .0189"
 .039"
 .078"
 .181"
 .223" NOM.
 (BY CALIPER)

2) PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX. 105°C
 TEMPERATURE RATING, MIN. -20°C
 WT./M', NOM., NET. 22.2 LBS.
 CHART 1:

QUABBIN P/N	JACKET COLOR
2056	BLACK
2057	BROWN
2058	RED
2059	ORANGE
2060	YELLOW
2061	GREEN
2062	BLUE
2063	VIOLET
2064	GRAY
2065	WHITE
2066	STARLIGHT BEIGE

3) ELECTRICAL CHARACTERISTICS:
 SEE PAGE 2


4) AGENCY APPROVALS:
 NEC (ETL) TYPE CMP
 CEC C(ETL) TYPE CMP

5) APPLICATION:
 RoHS COMPLIANT MATERIALS. MEETS TIA 568.2-D CAT 6A CHANNEL REQUIREMENTS AT 70 METERS. 10 METERS OF PATCH CABLE WITH A 90 METERS PERMANENT LINK (100 METER CHANNEL). SUPPORTS CAT 6A APPLICATIONS INCLUDING 10GBASE-T AT THESE LENGTHS, FOR OTHER COMBINATIONS SEE "CHANNEL REQUIREMENTS AND THE LENGTH OF STRANDED CABLE" TECHNICAL BRIEF. PATENT PENDING.

6) PRINT: (WHITE INK ON BLACK JACKET, ALL OTHERS BLACK INK)
 QUABBIN DATAMAX CAT 6a F/UTP PATCH CORD P/N (QWC P/N PER CHART 1) -- PATENT PENDING -- C(ETL)US TYPE CMP 26 AWG 105C -- RoHS -- (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)

7) COLOR CODE:
 1. NATURAL X ORANGE
 2. GRAY X BROWN
 3. NATURAL X GREEN
 4. GRAY X BLUE

8) PUT UPS
 TO BE PACKAGED AS PER QWC'S STANDARD PACKAGING

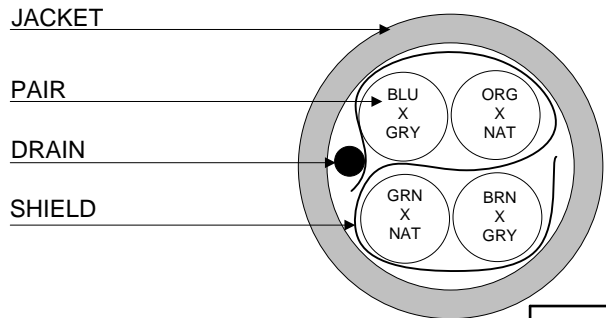

Created 04/19/19 BMD
 DRAWN: 04/19/19
 REV. 01 CHECKED: ZRS
 04/26/19



TITLE
 DATAMAX 26 AWG CAT 6a F/UTP PATCH CABLE
 - TYPE CMP

DRAWING# QWC0117 1 of 2

CUSTOMER APPROVAL: DATE:

3) ELECTRICAL CHARACTERISTICS: (FOR 100m OF CABLE)

CAPACITANCE, MUTUAL, NOM.	13.5 PF/FT. AT 1 MHz
DIELECTRIC WITHSTANDING, MIN.	1500V RMS
VOLTAGE RATING, MAX.	300V
D.C. RESISTANCE, MAX.	14.0 Ω (42.6 Ω /1,000' NOM.)

NOTE: TESTING FOR THE FOLLOWING IS CONDUCTED OFF THE REEL. (FOR 100m of CABLE)

IMPEDANCE, NOM.	100 \pm 15 Ω 1 - 100 MHz	100 \pm 20 Ω 100 - 500 MHz
RETURN LOSS	1 $\leq f <$ 10 MHz	20 + 5 LOG(f) dB MIN
	10 $\leq f <$ 20 MHz	25 dB MIN
	20 $\leq f \leq$ 500 MHz	25 - 8.6 LOG(f /20) dB MIN
PS NEXT	1 $\leq f \leq$ 500 MHz	42.3 - 15 LOG(f /100) dB MIN
NEXT	1 $\leq f \leq$ 500 MHz	44.3 - 15 LOG(f /100) dB MIN
PS ACRF	1 $\leq f \leq$ 500 MHz	24.8 - 20 LOG(f /100) dB MIN
ACRF	1 $\leq f \leq$ 500 MHz	27.8 - 20 LOG(f /100) dB MIN
INSERTION LOSS	1 $\leq f \leq$ 500 MHz	1.5[1.82 \sqrt{f} + 0.0091(f) + 0.25/ \sqrt{f}] dB MAX
DELAY	1 $\leq f \leq$ 500 MHz	534 + 36/ \sqrt{f} ns MAX
DELAY SKEW	1 $\leq f \leq$ 500 MHz	<45 ns
PS ANEXT LOSS (6 AROUND 1)	1 $\leq f \leq$ 500 MHz	62.5 - 15 LOG(f /100) dB 50 - 500 MHz 67 dB 1 - 50 MHz
PS AFEXT (6 AROUND 1)	1 $\leq f \leq$ 500 MHz	38.2 - 20 LOG(f /100) dB, 67 dB MIN
TCL	1 $\leq f \leq$ 500 MHz	30 - 10 LOG(f /100) dB MIN, 40 dB MIN
ELTCTL	1 $\leq f \leq$ 30 MHz	35 - 20 LOG(f) dB MIN
VELOCITY OF PROPAGATION	68%	

NOTE: ALL TESTING IS CONDUCTED OFF THE REEL.

Created 04/19/19	DRAWN: BMD 04/19/19
REV. 01	CHECKED: ZRS 04/26/19



TITLE	DATAMAX 26 AWG CAT 6a F/UTP PATCH CABLE - TYPE CMP
-------	-------------------------------------------------------

DRAWING#	QW/C0117	2 of 2
----------	----------	--------

CUSTOMER APPROVAL:

DATE: